



Pre-Applications

Pre-Application Narrative

Pre-Application Cash Transmittal



Project Narrative

For

PH60XC104

7330 N Pima Rd

Scottsdale, AZ 85258



Submitted by:

Steve Ciolek

Coal Creek Consulting

2166 E University Dr. #201

Tempe, AZ 85281

(480) 246-4131

sciolek@coal-creek.com

Existing Conditions

Sprint PCS, desires to renew its Use Permit for the Wireless Communication Facility (WCF) located at 7330 N Pima Road. Currently, there are the (3) flagpoles with canister antenna located at the entrance of the Days Inn & Suites. Flagpole were chosen to mitigate the visual impact of the WCF which allows the facility to blend with the surrounding environment. The existing ground equipment will remain screened by a CMU wall that blends with the architectural features of the Inn.

Sprint submitted case 107-SA-2005 to install the 3rd and final WCF flagpole in front of the Inn at Pima hotel. That case was approved as part of AT&T original submittal 30-UP-99. Since the approval in 2005, the Use Permit has not been renewed by any of the three carriers. Not renewing the Use Permit would result in the decommission of the facility, creating a significant GAP in Coverage. E-911 and other emergency services locate a callers position would be impacted if not renewed.



Nature of Request

Sprint is requesting approval for the Use Permit Renewal regarding the Stealth Wireless Communication Facility. The flagpoles were originally approved by the council on 3/7/00 and last approved in April 2005 when Sprint added their antennas. Sprint bring the facilities into compliance while upgrading their network. The facility will remain unchanged and the overall height will remain the same. Sprint will continue to operate under their existing license provided by the FCC which set very conservative, science-based RF emission guidelines that ensure citizen health is protected.

Conclusion

It is the goal to service the area with more reliable cellular service. By renewing the Use Permit at this location, Sprint will be able to continue providing the best service to its customers.



Existing Site



Existing Equipment Area



Looking North



Looking East



Looking South



Looking West



North Elevation



East Elevation



South Elevation



West Elevation

THESE OUTLINES SPECS IN CONJUNCTION WITH THE SPRINT STANDARD CONSTRUCTION SPECS, INCLUDING CONTRACT DOCUMENTS AND THE CONSTRUCTION DRAWINGS DESCRIBE THE WORK TO BE PERFORMED BY THE CONTRACTOR.

SECTION 01 100 – SCOPE OF WORK

THE WORK:
SHALL COMPLY WITH APPLICABLE NATIONAL CODES AND STANDARDS, LATEST EDITION, AND PORTIONS THEREOF.

PRECEDENCE:
SHOULD CONFLICTS OCCUR BETWEEN THE STANDARD CONSTRUCTION SPECIFICATIONS FOR WIRELESS SITES INCLUDING THE STANDARD CONSTRUCTION DETAILS FOR WIRELESS SITES AND THE CONSTRUCTION DRAWINGS, INFORMATION ON THE CONSTRUCTION DRAWINGS SHALL TAKE PRECEDENCE.

SITE FAMILIARITY:
CONTRACTOR SHALL BE RESPONSIBLE FOR FAMILIARIZING HIMSELF WITH ALL CONTRACT DOCUMENTS, FIELD CONDITIONS AND DIMENSIONS PRIOR TO PROCEEDING WITH CONSTRUCTION.

ON–SITE SUPERVISION:
THE CONTRACTOR SHALL SUPERVISE AND DIRECT THE WORK AND SHALL BE RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, AND PROCEDURES IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.

DRAWINGS, SPECIFICATIONS AND DETAILS REQUIRED AT JOBSITE:
THE CONSTRUCTION CONTRACTOR SHALL MAINTAIN A FULL SET OF THE CONSTRUCTION DRAWINGS AT THE JOBSITE FROM MOBILIZATION THROUGH CONSTRUCTION COMPLETION.

- A. DETAILS ARE INTENDED TO SHOW DESIGN INTENT. PROVIDE ALL MATERIALS AND LABOR AS REQUIRED TO PROVIDE A COMPLETE AND FUNCTIONING SYSTEM. MODIFICATIONS MAY BE REQUIRED TO SUIT JOB DIMENSIONS OR CONDITIONS, AND SUCH MODIFICATIONS SHALL BE INCLUDED AS PART OF THE WORK.
- B. CONTRACTOR SHALL NOTIFY SPRINT CONSTRUCTION MANAGER OF ANY VARIATIONS PRIOR TO PROCEEDING WITH THE WORK.DIMENSIONS SHOWN ARE TO FINISH SURFACES UNLESS NOTED OTHERWISE. MODIFICATIONS MAY BE REQUIRED TO SUIT JOB DIMENSIONS OR CONDITIONS, AND SUCH MODIFICATIONS SHALL BE INCLUDED AS PART OF THE WORK.

- C. MARK THE FIELD SET OF DRAWINGS IN RED, DOCUMENTING ANY CHANGES FROM THE CONSTRUCTION DOCUMENTS.

METHODS OF PROCEDURE (MOPS) FOR CONSTRUCTION:
CONTRACTOR SHALL PERFORM WORK AS DESCRIBED IN

- A. COAX COLOR CODING SWEEPS AND FIBER TESTING TS–0200 AND EL–0568
- B. CABLE LABELING EN–2012–00
- C. APPLICABLE INSTALLATION MOPS IDENTIFIED ELSEWHERE IN THE CONTRACT DOCUMENTS

SECTION 01 200 – COMPANY FURNISHED MATERIAL AND EQUIPMENT

COMPANY FURNISHED MATERIAL AND EQUIPMENT IS IDENTIFIED ON THE RF DATA SHEET IN THE CONSTRUCTION DRAWINGS.

CONTRACTOR IS RESPONSIBLE FOR SPRINT PROVIDED MATERIAL AND EQUIPMENT TO ENSURE IT IS PROTECTED AND HANDLED PROPERLY THROUGHOUT THE CONSTRUCTION DURATION.

CONTRACTOR RESPONSIBLE FOR RECEIPT OF SPRINT FURNISHED EQUIPMENT AT CELL SITE OR CONTRACTORS LOCATION. CONTRACTOR TO COMPLETE SHIPPING AND RECEIPT DOCUMENTATION IN ACCORDANCE WITH COMPANY PRACTICE.

SECTION 01 300 – CELL SITE CONSTRUCTION

NOTICE TO PROCEED:
NO WORK SHALL COMMENCE PRIOR TO COMPANY’S WRITTEN NOTICE TO PROCEED AND THE ISSUANCE OF WORK ORDER.

SITE CLEANLINESS:
CONTRACTOR SHALL KEEP THE SITE FREE FROM ACCUMULATING WASTE MATERIAL, DEBRIS, AND TRASH. AT THE COMPLETION OF THE WORK, CONTRACTOR SHALL REMOVE FROM THE SITE ALL REMAINING RUBBISH, IMPLEMENTS, TEMPORARY FACILITIES, AND SURPLUS MATERIALS.

SECTION 01 400 – SUBMITTALS & TESTS

ALTERNATES:
AT THE COMPANY’S REQUEST, ANY ALTERNATIVES TO THE MATERIALS OR METHODS SPECIFIED SHALL BE SUBMITTED TO SPRINTS CONSTRUCTION MANAGER FOR APPROVAL. SPRINT WILL REVIEW AND APPROVE ONLY THOSE REQUESTS MADE IN WRITING. NO VERBAL APPROVALS WILL BE CONSIDERED,

TESTS AND INSPECTIONS:

- A. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL CONSTRUCTION TESTS, INSPECTIONS AND PROJECT DOCUMENTATION.
- B. CONTRACTOR SHALL ACCOMPLISH TESTING INCLUDING BUT NOT LIMITED TO THE FOLLOWING:
1. COAX SWEEPS AND FIBER TESTS PER TS–0200 REV 4 ANTENNA LINE ACCEPTANCE STANDARDS.
2. AGL, AZIMUTH AND DOWNTILT PROVIDE AN AUTOMATED REPORT UPLOADED TO SITERRA USING A COMMERCIAL MADE–FOR THE PURPOSE ELECTRONIC ANTENNA ALIGNMENT TOOL (AAT). INSTALLED AZIMUTH, CENTERLINE AND DOWNTILT MUST CONFORM WITH RF CONFIGURATION DATA
3. CONTRACTOR SHALL BE RESPONSIBLE FOR ANY AND ALL CORRECTIONS TO ANY WORK IDENTIFIED AS UNACCEPTABLE IN SITE INSPECTION ACTIVITIES AND/OR AS A RESULT OF TESTING.
4. ALL TESTING REQUIRED BY APPLICABLE INSTALLATION MOPS.

- C. REQUIRED CLOSEOUT DOCUMENTATION INCLUDES, BUT IS NOT LIMITED TO THE FOLLOWING;
1. AZIMUTH, DOWNTILT, AGL FROM SUNSIGHT INSTRUMENTS – ANTENNALIGN ALIGNMENT TOOL (AAT)
2. SWEEP AND FIBER TESTS
3. SCALABLE BARCODE PHOTOGRAPHS OF TOWER TOP AND INACCESSIBLE SERIALIZED EQUIPMENT
4. ALL AVAILABLE JURISDICTIONAL PERMIT AND OCCUPANCY INFORMATION
5. PDF SCAN OF REDLINES PRODUCED IN FIELD
6. A PDF SCAN OF REDLINE MARK–UPS SUITABLE FOR USE IN ELECTRONIC AS–BUILT DRAWING PRODUCTION
7. LIEN WAIVERS
8. FINAL PAYMENT APPLICATION
9. REQUIRED FINAL CONSTRUCTION PHOTOS
10. CONSTRUCTION AND COMMISSIONING CHECKLIST COMPLETE WITH NO DEFICIENT ITEMS
11. APPLICABLE POST NTP TASKS INCLUDING DOCUMENT UPLOADS COMPLETED IN SITERRA (SPRINTS DOCUMENT REPOSITORY OF RECORD).
12. CLOSEOUT PHOTOGRAPHS AND CLOSEOUT CHECKLIST: SPRINT WILL PROVIDE SEPARATE GUIDANCE

SECTION 11 700 – ANTENNA ASSEMBLY, REMOTE RADIO UNITS AND CABLE INSTALLATION

SUMMARY:
THIS SECTION SPECIFIES INSTALLATION OF ANTENNAS, RRH’S, AND CABLE EQUIPMENT, INSTALLATION, AND TESTING OF COAXIAL FIBER CABLE.

ANTENNAS AND RRH’S:
THE NUMBER AND TYPE OF ANTENNAS AND RRH’S TO BE INSTALLED IS DETAILED ON THE CONSTRUCTION DRAWINGS.

HYBRID CABLE:
HYBRID CABLE WILL BE DC/FIBER AND FURNISHED FOR INSTALLATION AT EACH SITE. CABLE SHALL BE INSTALLED PER THE CONSTRUCTION DRAWINGS AND THE APPLICABLE MANUFACTURER’S REQUIREMENTS.

JUMPERS AND CONNECTORS:
FURNISH AND INSTALL 1/2” COAX JUMPER CABLES BETWEEN THE RRH’S AND ANTENNAS. JUMPERS SHALL BE TYPE LDF 4, FLC 12–50, CR 540, OR FXL 540. SUPER–FLEX CABLES ARE NOT ACCEPTABLE. JUMPERS BETWEEN THE RRH’S AND ANTENNAS OR TOWER TOP AMPLIFIERS SHALL CONSIST OF 1/2 INCH FOAM DIELECTRIC, OUTDOOR RATED COAXIAL CABLE, MIN LENGTH FOR JUMPER SHALL BE 10”–0”.

REMOTE ELECTRICAL TILT (RET) CABLES:

MISCELLANEOUS:
INSTALL SPLITTERS, COMBINERS, FILTERS PER RF DATA SHEET, FURNISHED BY SPRINT.

ANTENNA INSTALLATION:
THE CONTRACTOR SHALL ASSEMBLE ALL ANTENNAS ONSITE IN ACCORDANCE WITH THE INSTRUCTIONS SUPPLIED BY THE MANUFACTURER. ANTENNA HEIGHT, AZIMUTH, AND FEED ORIENTATION INFORMATION SHALL BE A DESIGNATED ON THE CONSTRUCTION DRAWINGS.

- A. THE CONTRACTOR SHALL POSITION THE ANTENNA ON TOWER PIPE MOUNTS SO THAT THE BOTTOM STRUT IS LEVEL. THE PIPE MOUNTS SHALL BE PLUMB TO WITHIN 1 DEGREE.
- B. ANTENNA MOUNTING REQUIREMENTS: PROVIDE ANTENNA MOUNTING HARDWARE AS INDICATED ON THE DRAWINGS.

HYBRID CABLE INSTALLATION:

- A. THE CONTRACTOR SHALL ROUTE, TEST, AND INSTALL ALL CABLES AS INDICATED ON THE CONSTRUCTION DRAWINGS AND IN ACCORDANCE WITH THE MANUFACTURER’S RECOMMENDATIONS.
- B. THE INSTALLED RADIUS OF THE CABLES SHALL NOT BE LESS THAN THE MANUFACTURER’S SPECIFICATIONS FOR BENDING RADII.
- C. EXTREME CARE SHALL BE TAKEN TO AVOID DAMAGE TO THE CABLES DURING HANDLING AND INSTALLATION.
1. FASTENING MAIN HYBRID CABLES: ALL CABLES SHALL BE INSTALLED INSIDE MONOPOLE WITH CABLE SUPPORT GRIPS AS REQUIRED BY THE MANUFACTURER.
2. FASTENING INDIVIDUAL FIBER AND DC CABLES ABOVE BREAKOUT ENCLOSURE (MEDUSA), WITHIN THE MMBS CABINET AND ANY INTERMEDIATE DISTRIBUTION BOXES:

- a. FIBER: SUPPORT FIBER BUNDLES USING ½” VELCRO STRAPS OF THE REQUIRED LENGTH @ 18” OC. STRAPS SHALL BE UV, OIL AND WATER RESISTANT AND SUITABLE FOR INDUSTRIAL INSTALLATIONS AS MANUFACTURED BY TEXTOL OR APPROVED EQUAL.
- b. DC: SUPPORT DC BUNDLES WITH ZIP TIES OF THE ADEQUATE LENGTH. ZIP TIES TO BE UV STABILIZED, BLACK NYLON, WITH TENSILE STRENGTH AT 12,000 PSI AS MANUFACTURED BY NELCO PRODUCTS OR EQUAL.

3. FASTENING JUMPERS: SECURE JUMPERS TO THE SIDE ARMS OR HEAD FRAMES USING STAINLESS STEEL TIE WRAPS OR STAINLESS STEEL BUTTERFLY CLIPS.
4. CABLE INSTALLATION:
- a. INSPECT CABLE PRIOR TO USE FOR SHIPPING DAMAGE, NOTIFY THE CONSTRUCTION MANAGER.
- b. CABLE ROUTING: CABLE INSTALLATION SHALL BE PLANNED TO ENSURE THAT THE LINES WILL BE PROPERLY ROUTED IN THE CABLE ENVELOP AS INDICATED ON THE DRAWINGS. AVOID TWISTING AND CROSSEOVERS.
- c. HOIST CABLE USING PROPER HOISTING GRIPS. DO NOT EXCEED MANUFACTURES RECOMMENDED MAXIMUM BEND RADIUS.
5. GROUNDING OF TRANSMISSION LINES: ALL TRANSMISSION LINES SHALL BE GROUNDED AS INDICATED ON DRAWINGS.
6. HYBRID CABLE COLOR CODING: ALL COLOR CODING SHALL BE AS REQUIRED IN TS 0200 REV 4.
7. HYBRID CABLE LABELING: INDIVIDUAL HYBRID AND DC BUNDLES SHALL BE LABELED ALPHA–NUMERICALLY ACCORDING TO SPRINT CELL SITE ENGINEERING NOTICE – EN 2012–001, REV 1

WEATHERPROOFING EXTERIOR CONNECTORS AND HYBRID CABLE GROUND KITS:

- A. ALL FIBER & COAX CONNECTORS AND GROUND KITS SHALL BE WEATHERPROOFED.
- B. WEATHERPROOFED USING ONE OF THE FOLLOWING METHODS. ALL INSTALLATIONS MUST BE DONE IN ACCORDANCE WITH THE MANUFACTURER’S RECOMMENDATIONS AND INDUSTRY BEST PRACTICES.
1. COLD SHRINK: ENCOMPASS CONNECTOR IN COLD SHRINK TUBING AND PROVIDE A DOUBLE WRAP OF 2” ELECTRICAL TAPE EXTENDING 2” BEYOND TUBING. PROVIDE 3M COLD SHRINK CXS SERIES OR EQUAL.
2. SELF–AMALGAMATING TAPE: CLEAN SURFACES. APPLY A DOUBLE WRAP OF SELF–AMALGAMATING TAPE 2” BEYOND CONNECTOR. APPLY A SECOND WRAP OF SELF–AMALGAMATING TAPE IN OPPOSITE DIRECTION. APPLY DOUBLE WRAP OF 2” WIDE ELECTRICAL TAPE EXTENDING 2” BEYOND THE SELF–AMALGAMATING TAPE.
3. 3M SLIM LOCK CLOSURE 716: SUBSTITUTIONS WILL NOT BE ALLOWED.
4. OPEN FLAME ON JOB SITE IS NOT ACCEPTABLE

SECTION 11 800 – INSTALLATION OF MULTIMODAL BASE STATIONS (MMBS) AND RELATED EQUIPMENT

- A. THIS SECTION SPECIFIES MMBS CABINETS, POWER CABINETS, AND INTERNAL EQUIPMENT INCLUDING BY NOT LIMITED TO RECTIFIERS, POWER DISTRIBUTION UNITS, BASE BAND UNITS, SURGE ARRESTORS, BATTERIES, AND SIMILAR EQUIPMENT FURNISHED BY THE COMPANY FOR INSTALLATION BY THE CONTRACTOR (OFCI).
- B. CONTRACTOR SHALL PROVIDE AND INSTALL ALL MISCELLANEOUS MATERIALS AND PROVIDE ALL LABOR REQUIRED FOR INSTALLATION EQUIPMENT IN EXISTING CABINET OR NEW CABINET AS SHOWN ON DRAWINGS AND AS REQUIRE BY THE APPLICABLE INSTALLATION MOPS.
- C. COMPLY WITH MANUFACTURERS INSTALLATION AND START–UP REQUIREMENTS

PLANS PREPARED FOR



CONSULTANT

COAL CREEK



2166 E. UNIVERSITY DR., STE 201
TEMPE, ARIZONA 85281
PHONE: (602) 429–0533 FAX: (480) 638–2852

ENGINEER OF RECORD

TERRA DYNAMIC ENGINEERING, LLC



P.O. BOX 22131, PHOENIX, AZ 85028
PHONE: (602) 482–1603
EMAIL: ROBERT@TERRADYNAMIC.US



NO.	DATE	DESCRIPTION	BY
1	05/08/19	REVIEW	SPE
2	05/14/19	REVISION 1	SPE
3	05/21/19	REVISION 2	SPE
4	05/23/19	SUBMITTAL	SPE

PROJECT INFORMATION

JOB: 01–235–04

PH60XC104
DAYS INN
AND SUITES

7330 N. PIMA RD.
SCOTTSDALE, ARIZONA 85258

SHEET TITLE

SPRINT
SPECIFICATIONS

SHEET NUMBER

SP–1

SECTION 26 100 – BASIC ELECTRICAL REQUIREMENTS

SUMMARY:
THIS SECTION SPECIFIES BASIC ELECTRICAL REQUIREMENTS FOR SYSTEMS AND COMPONENTS.

QUALITY ASSURANCE:

- A. ALL EQUIPMENT FURNISHED UNDER DIVISION 26 SHALL CARRY UL LABELS AND LISTINGS WHERE SUCH LABELS AND LISTINGS ARE AVAILABLE IN THE INDUSTRY.
- B. MANUFACTURERS OF EQUIPMENT SHALL HAVE A MINIMUM OF THREE YEARS EXPERIENCE WITH THEIR EQUIPMENT INSTALLED AND OPERATING IN THE FIELD IN A USE SIMILAR TO THE NEW USE FOR THIS PROJECT.
- C. MATERIALS AND EQUIPMENT: ALL MATERIALS AND EQUIPMENT SPECIFIED IN DIVISION 26 OF THE SAME TYPE SHALL BE OF THE SAME MANUFACTURER AND SHALL BE NEW, OF THE BEST QUALITY AND DESIGN, AND FREE FROM DEFECTS

SUPPORTING DEVICES:

- A. ALL EQUIPMENT FURNISHED UNDER DIVISION 26 SHALL CARRY UL LABELS AND LISTINGS WHERE SUCH LABELS AND LISTINGS ARE AVAILABLE IN THE INDUSTRY.
- B. MANUFACTURERS OF EQUIPMENT SHALL HAVE A MINIMUM OF THREE YEARS EXPERIENCE WITH THEIR EQUIPMENT INSTALLED AND OPERATING IN THE FIELD IN A USE SIMILAR TO THE NEW USE FOR THIS PROJECT.
- C. MATERIALS AND EQUIPMENT: ALL MATERIALS AND EQUIPMENT SPECIFIED IN DIVISION 26 OF THE SAME TYPE SHALL BE OF THE SAME MANUFACTURER AND SHALL BE NEW, OF THE BEST QUALITY AND DESIGN, AND FREE FROM DEFECTS

SUPPORTING DEVICES:

- A. MANUFACTURED STRUCTURAL SUPPORT MATERIALS: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE PRODUCTS BY THE FOLLOWING:
1. ALLIED TUBE AND CONDUIT
2. B–LINE SYSTEM
3. UNISTRUT DIVERSIFIED PRODUCTS
4. THOMAS & BETTS
- B. FASTENERS: TYPES, MATERIALS, AND CONSTRUCTION FEATURES AS FOLLOWS:
1. EXPANSION ANCHORS: CARBON STEEL WEDGE OR SLEEVE TYPE.
2. POWER–DRIVEN THREADED STUDS: HEAT–TREATED STEEL, DESIGNED SPECIFICALLY FOR THE INTENDED SERVICE.
3. FASTEN BY MEANS OF WOOD SCREWS ON WOOD.
4. TOGGLE BOLTS ON HOLLOW MASONRY UNITS.
5. CONCRETE INSERTS OR EXPANSION BOLTS ON CONCRETE OR SOLID MASONRY.
6. MACHINE SCREWS, WELDED THREADED STUDS, OR SPRING–TENSION CLAMPS ON STEEL.
7. EXPLOSIVE DEVICES FOR ATTACHING HANGERS TO STRUCTURE SHALL NOT BE PERMITTED.
8. DO NOT WELD CONDUIT, PIPE STRAPS, OR ITEMS OTHER THAN THREADED STUDS TO STEEL STRUCTURES.
9. IN PARTITIONS OF LIGHT STEEL CONSTRUCTION, USE SHEET METAL SCREWS.

SUPPORTING DEVICES:

- A. INSTALL SUPPORTING DEVICES TO FASTEN ELECTRICAL COMPONENTS SECURELY AND PERMANENTLY IN ACCORDANCE WITH NEC.
- B. COORDINATE WITH THE BUILDING STRUCTURAL SYSTEM AND WITH OTHER TRADES.
- C. UNLESS OTHERWISE INDICATED ON THE DRAWINGS, FASTEN ELECTRICAL ITEMS AND THEIR SUPPORTING HARDWARE SECURELY TO THE STRUCTURE IN ACCORDANCE WITH THE FOLLOWING:
- D. ENSURE THAT THE LOAD APPLIED BY ANY FASTENER DOES NOT EXCEED 25 PERCENT OF THE PROOF TEST LOAD.
- E. USE VIBRATION AND SHOCK–RESISTANT FASTENERS FOR ATTACHMENTS TO CONCRETE SLABS.

ELECTRICAL IDENTIFICATION:

- A. UPDATE AND PROVIDE TYPED CIRCUIT BREAKER SCHEDULES IN THE MOUNTING BRACKET, INSIDE DOORS OF AC PANEL BOARDS WITH ANY CHANGES MADE TO THE AC SYSTEM.
- B. BRANCH CIRCUITS FEEDING AVIATION OBSTRUCTION LIGHTING EQUIPMENT SHALL BE CLEARLY IDENTIFIED AS SUCH AT THE BRANCH CIRCUIT PANELBOARD.

SECTION 26 200 – ELECTRICAL MATERIALS AND EQUIPMENT

CONDUIT:

- A. RIGID GALVANIZED STEEL (RGS) CONDUIT SHALL BE USED FOR EXTERIOR LOCATIONS ABOVE GROUND AND IN UNFINISHED INTERIOR LOCATIONS AND FOR ENCASED RUNS IN CONCRETE. RIGID CONDUIT AND FITTINGS SHALL BE STEEL, COATED WITH ZINC EXTERIOR AND INTERIOR BY THE HOT DIP GALVANIZING PROCESS. CONDUIT SHALL BE PRODUCED TO ANSI SPECIFICATIONS C80.1, FEDERAL SPECIFICATION WW–C–581 AND SHALL BE LISTED WITH THE UNDERWRITERS’ LABORATORIES. FITTINGS SHALL BE THREADED – SET SCREW OR COMPRESSION FITTINGS WILL NOT BE ACCEPTABLE. RGS CONDUITS SHALL BE MANUFACTURED BY ALLIED, REPUBLIC OR WHEATLAND.
- B. UNDERGROUND CONDUIT IN CONCRETE SHALL BE POLYVINYLCHLORIDE (PVC) SUITABLE FOR DIRECT BURIAL AS APPLICABLE. JOINTS SHALL BE BELLED, AND FLUSH SOLVENT WELDED IN ACCORDANCE WITH MANUFACTURER’S INSTRUCTIONS. CONDUIT SHALL BE CARLON ELECTRICAL PRODUCTS OR APPROVED EQUAL.
- C. TRANSITIONS BETWEEN PVC AND RIGID (RGS) SHALL BE MADE WITH PVC COATED METALLIC LONG SWEEP RADIUS ELBOWS.
- D. EMT OR RIGID GALVANIZED STEEL CONDUIT MAY BE USED IN FINISHED SPACES CONCEALED IN WALLS AND CEILINGS. EMT SHALL BE MILD STEEL, ELECTRICALLY WELDED, ELECTRO–GALVANIZED OR HOT–DIPPED GALVANIZED AND PRODUCED TO ANSI SPECIFICATION C80.3, FEDERAL SPECIFICATION WW–C–563, AND SHALL BE UL LISTED. EMT SHALL BE MANUFACTURED BY ALLIED, REPUBLIC OR WHEATLAND, OR APPROVED EQUAL. FITTINGS SHALL BE METALLIC COMPRESSION. SET SCREW CONNECTIONS SHALL NOT BE ACCEPTABLE.
- E. LIQUID TIGHT FLEXIBLE METALLIC CONDUIT SHALL BE USED FOR FINAL CONNECTION TO EQUIPMENT. FITTINGS SHALL BE METALLIC GLAND TYPE COMPRESSION FITTINGS, MAINTAINING THE INTEGRITY OF CONDUIT SYSTEM. SET SCREW CONNECTIONS SHALL NOT BE ACCEPTABLE. MAXIMUM LENGTH OF FLEXIBLE CONDUIT SHALL NOT EXCEED 6–FEET. LFMC SHALL BE PROTECTED AND SUPPORTED AS REQUIRE BY NEC. MANUFACTURERS OF FLEXIBLE CONDUITS SHALL BE CAROL, ANACONDA METAL HOSE OR UNIVERSAL METAL HOSE, OR APPROVED EQUAL.
- F. MINIMUM SIZE CONDUIT SHALL BE 3/4 INCH (21MM).

HUBS AND BOXES:

- A. AT ENTRANCES TO CABINETS OR OTHER EQUIPMENT NOT HAVING INTEGRAL THREADED HUBS PROVIDE METALLIC THREADED HUBS OF THE SIZE AND CONFIGURATION REQUIRED. HUB SHALL INCLUDE LOCKNUT AND NEOPRENE O–RING SEAL. PROVIDE IMPACT RESISTANT 105 DEGREE C PLASTIC BUSHINGS TO PROTECT CABLE INSULATION.
- B. CABLE TERMINATION FITTINGS FOR CONDUIT
1. CABLE TERMINATORS FOR RGS CONDUITS SHALL BE TYPE CRC BY O–Z/GEDNEY OR EQUAL BY ROX TEC.
2. CABLE TERMINATORS FOR LFMC SHALL BE ETCO – CL2075; OR MADE FOR THE PURPOSE PRODUCTS BY ROXTEC.
- C. EXTERIOR PULL BOXES AND PULL BOXES IN INTERIOR INDUSTRIAL AREAS SHALL BE PLATED CAST ALLOY, HEAVY DUTY, WEATHERPROOF, DUST PROOF, WITH GASKET, PLATED IRON ALLOY COVER AND STAINLESS STEEL COVER SCREWS, CROUSE–HINDS WAB SERIES OR EQUAL.
- D. CONDUIT OUTLET BODIES SHALL BE PLATED CAST ALLOY WITH SIMILAR GASKETED COVERS. OUTLET BODIES SHALL BE OF THE CONFIGURATION AND SIZE SUITABLE FOR THE APPLICATION. PROVIDE CROUSE–HINDS FORM 8 OR EQUAL.
- E. MANUFACTURER FOR BOXES AND COVERS SHALL BE HOFFMAN, SQUARE ”D”, CROUSE–HINDS, COOPER, ADALET, APPLETON, O–Z GEDNEY, RACO, OR APPROVED EQUAL.

SUPPLEMENTAL GROUNDING SYSTEM

- A. FURNISH AND INSTALL A SUPPLEMENTAL GROUNDING SYSTEM TO THE EXTENT INDICATED ON THE DRAWINGS. SUPPORT SYSTEM WITH NON–MAGNETIC STAINLESS STEEL CLIPS WITH RUBBER GROMMETS. GROUNDING CONNECTORS SHALL BE TINNED COPPER WIRE, SIZES AS INDICATED ON THE DRAWINGS. PROVIDE STRANDED OR SOLID BARE OR INSULATED CONDUCTORS EXCEPTED AS OTHERWISE NOTED.
- B. SUPPLEMENTAL GROUNDING SYSTEM: ALL CONNECTIONS TO BE MADE WITH CAD WELDS, EXCEPT AT EQUIPMENT USE LUGS OR OTHER AVAILABLE GROUNDING MEANS AS REQUIRED BY MANUFACTURER; AT GROUND BARS USE TWO HOLE SPADES WITH NO OX.
- C. STOLEN GROUND–BARS: IN THE EVENT OF STOLEN GROUND BARS, CONTACT SPRINT CM FOR REPLACEMENT INSTRUCTION USING THREADED ROD KITS.

EXISTING STRUCTURE:

- A. EXISTING EXPOSED WIRING AND ALL EXPOSED OUTLETS, RECEPTACLES, SWITCHES, DEVICES, BOXES, AND OTHER EQUIPMENT THAT ARE NOT TO BE UTILIZED IN THE COMPLETED PROJECT SHALL BE REMOVED OR DE–ENERGIZED AND CAPPED IN THE WALL, CEILING, OR FLOOR SO THAT THEY ARE CONCEALED AND SAFE. WALL, CEILING, OR FLOOR SHALL BE PATCHED TO MATCH THE ADJACENT CONSTRUCTION.

CONDUIT AND CONDUCTOR INSTALLATION:

- A. CONDUITS SHALL BE FASTENED SECURELY IN PLACE WITH APPROVED NON–PERFORATED STRAPS AND HANGERS. EXPLOSIVE DEVICES FOR ATTACHING HANGERS TO STRUCTURE WILL NOT BE PERMITTED. CLOSELY FOLLOW THE LINES OF THE STRUCTURE, MAINTAIN CLOSE PROXIMITY TO THE STRUCTURE AND KEEP CONDUITS IN TIGHT ENVELOPES. CHANGES IN DIRECTION TO ROUTE AROUND OBSTACLES SHALL BE MADE WITH CONDUIT OUTLET BODIES. CONDUIT SHALL BE INSTALLED IN A NEAT AND WORKMANLIKE MANNER, PARALLEL AND PERPENDICULAR TO STRUCTURE WALL AND CEILING LINES. ALL CONDUIT SHALL BE FISHED TO CLEAR OBSTRUCTIONS. ENDS OF CONDUITS SHALL BE TEMPORARILY CAPPED TO PREVENT CONCRETE, PLASTER OR DIRT FROM ENTERING. CONDUITS SHALL BE RIGIDLY CLAMPED TO BOXES BY GALVANIZED MALLEABLE IRON BUSHING ON INSIDE AND GALVANIZED MALLEABLE IRON LOCKNUT ON OUTSIDE AND INSIDE.
- B. CONDUCTORS SHALL BE PULLED IN ACCORDANCE WITH ACCEPTED GOOD PRACTICE.

ENGINEERS NOTES

1. IF A DISCREPANCY ARISES BETWEEN THE DRAWINGS AND FIELD CONDITIONS, OR WHERE A DETAIL IS DOUBTFUL OF INTERPRETATION, OR AN UNANTICIPATED FIELD CONDITION IS ENCOUNTERED, THE ENGINEER SHALL BE CALLED IMMEDIATELY FOR PROCEDURE TO BE FOLLOWED. SUCH INSTRUCTIONS SHALL BE CONFIRMED IN WRITING AND DISTRIBUTED TO ALL AFFECTED PARTIES.

2. THE ENGINEER WILL NOT BE RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, PROCEDURES, SAFETY PRECAUTIONS, OR PROGRAMS UTILIZED IN CONNECTION WITH THE WORK, AND WILL NOT BE RESPONSIBLE FOR THE CONTRACTOR’S FAILURE TO CARRY OUT THE WORK IN ACCORDANCE WITH THE CONSTRUCTION DRAWING AND/OR DOCUMENTS.

3. CONTRACTOR SHALL BE RESPONSIBLE FOR PROPER LAYOUT OF IMPROVEMENTS BASED UPON SETBACKS/ PROPERTY LINE LOCATION. DIMENSIONAL RELATIONSHIPS TO EQUIPMENT ARE APPROXIMATE AND ARE FOR ILLUSTRATIVE PURPOSES ONLY.

4. CONTRACTOR TO MAINTAIN ALL DRAINAGE PATHS FREE FROM ANY OBSTRUCTIONS (I.E. DEBRIS AND SILT).

5. CONTRACTOR TO PROVIDE POSITIVE DRAINAGE AWAY FROM EQUIPMENT.

6. IF THE SPECIFIED EQUIPMENT CANNOT BE INSTALLED AS SHOWN ON THESE DRAWINGS, THE SUBCONTRACTOR SHALL PROPOSE AN ALTERNATIVE INSTALLATION FOR APPROVAL BY THE CONTRACTOR AND ENGINEER OF RECORD.

7. SUBCONTRACTOR SHALL DETERMINE ACTUAL ROUTING OF CONDUIT, POWER AND T1 CABLES, GROUNDING CABLES AS SHOWN ON THE POWER, GROUNDING AND TELCO PLAN DRAWING. SUBCONTRACTOR SHALL UTILIZE EXISTING TRAYS AND/OR SHALL ADD NEW TRAYS AS NECESSARY. SUBCONTRACTOR SHALL CONFIRM THE ACTUAL ROUTING WITH THE CONTRACTOR. ROUTING OF TRENCHING SHALL BE APPROVED BY CONTRACTOR

UTILITY NOTES

1. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO CONTACT BLUESTAKE AT LEAST TWO FULL WORKING DAYS (48 HOURS) PRIOR TO BEGINNING OF ANY EXCAVATING.

2. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO LOCATE ALL STRUCTURES, UNDERGROUND PIPELINES, ELECTRIC AND TELEPHONE CONDUITS, EITHER SHOWN OR NOT SHOWN ON THE PLANS PRIOR TO ANY CONSTRUCTION, AND TO OBSERVE ALL POSSIBLE PRECAUTIONS TO AVOID ANY DAMAGE TO THESE FACILITIES. THE ENGINEERING AND/OR DEVELOPER WILL NOT GUARANTEE ANY ELEVATIONS OR LOCATIONS OF EXISTING UNDERGROUND UTILITIES SHOWN ON THESE PLANS.

3. CONTRACTOR TO VERIFY LOCATION AND ELEVATION OF ALL UTILITY CONNECTIONS.

PLANS PREPARED FOR



CONSULTANT

COAL CREEK



2166 E. UNIVERSITY DR., STE 201
TEMPE, ARIZONA 85281
PHONE: (602) 429–0533 FAX: (480) 638–2852

ENGINEER OF RECORD

TERRA DYNAMIC ENGINEERING, LLC



P.O. BOX 22131, PHOENIX, AZ 85028
PHONE: (602) 482–1603
EMAIL: ROBERT@TERRADYNAMIC.US



Roberto Orlando

NO.	DATE	DESCRIPTION	BY
1	05/08/19	REVIEW	SPE
2	05/14/19	REVISION 1	SPE
3	05/21/19	REVISION 2	SPE
4	05/23/19	SUBMITTAL	SPE

PROJECT INFORMATION

JOB: 01–235–04

PH60XC104
DAYS INN
AND SUITES


7330 N. PIMA RD.
SCOTTSDALE, ARIZONA 85258

SHEET TITLE

SPRINT
SPECIFICATIONS,
ENGINEERS AND
UTILITY NOTES

SHEET NUMBER

SP–2

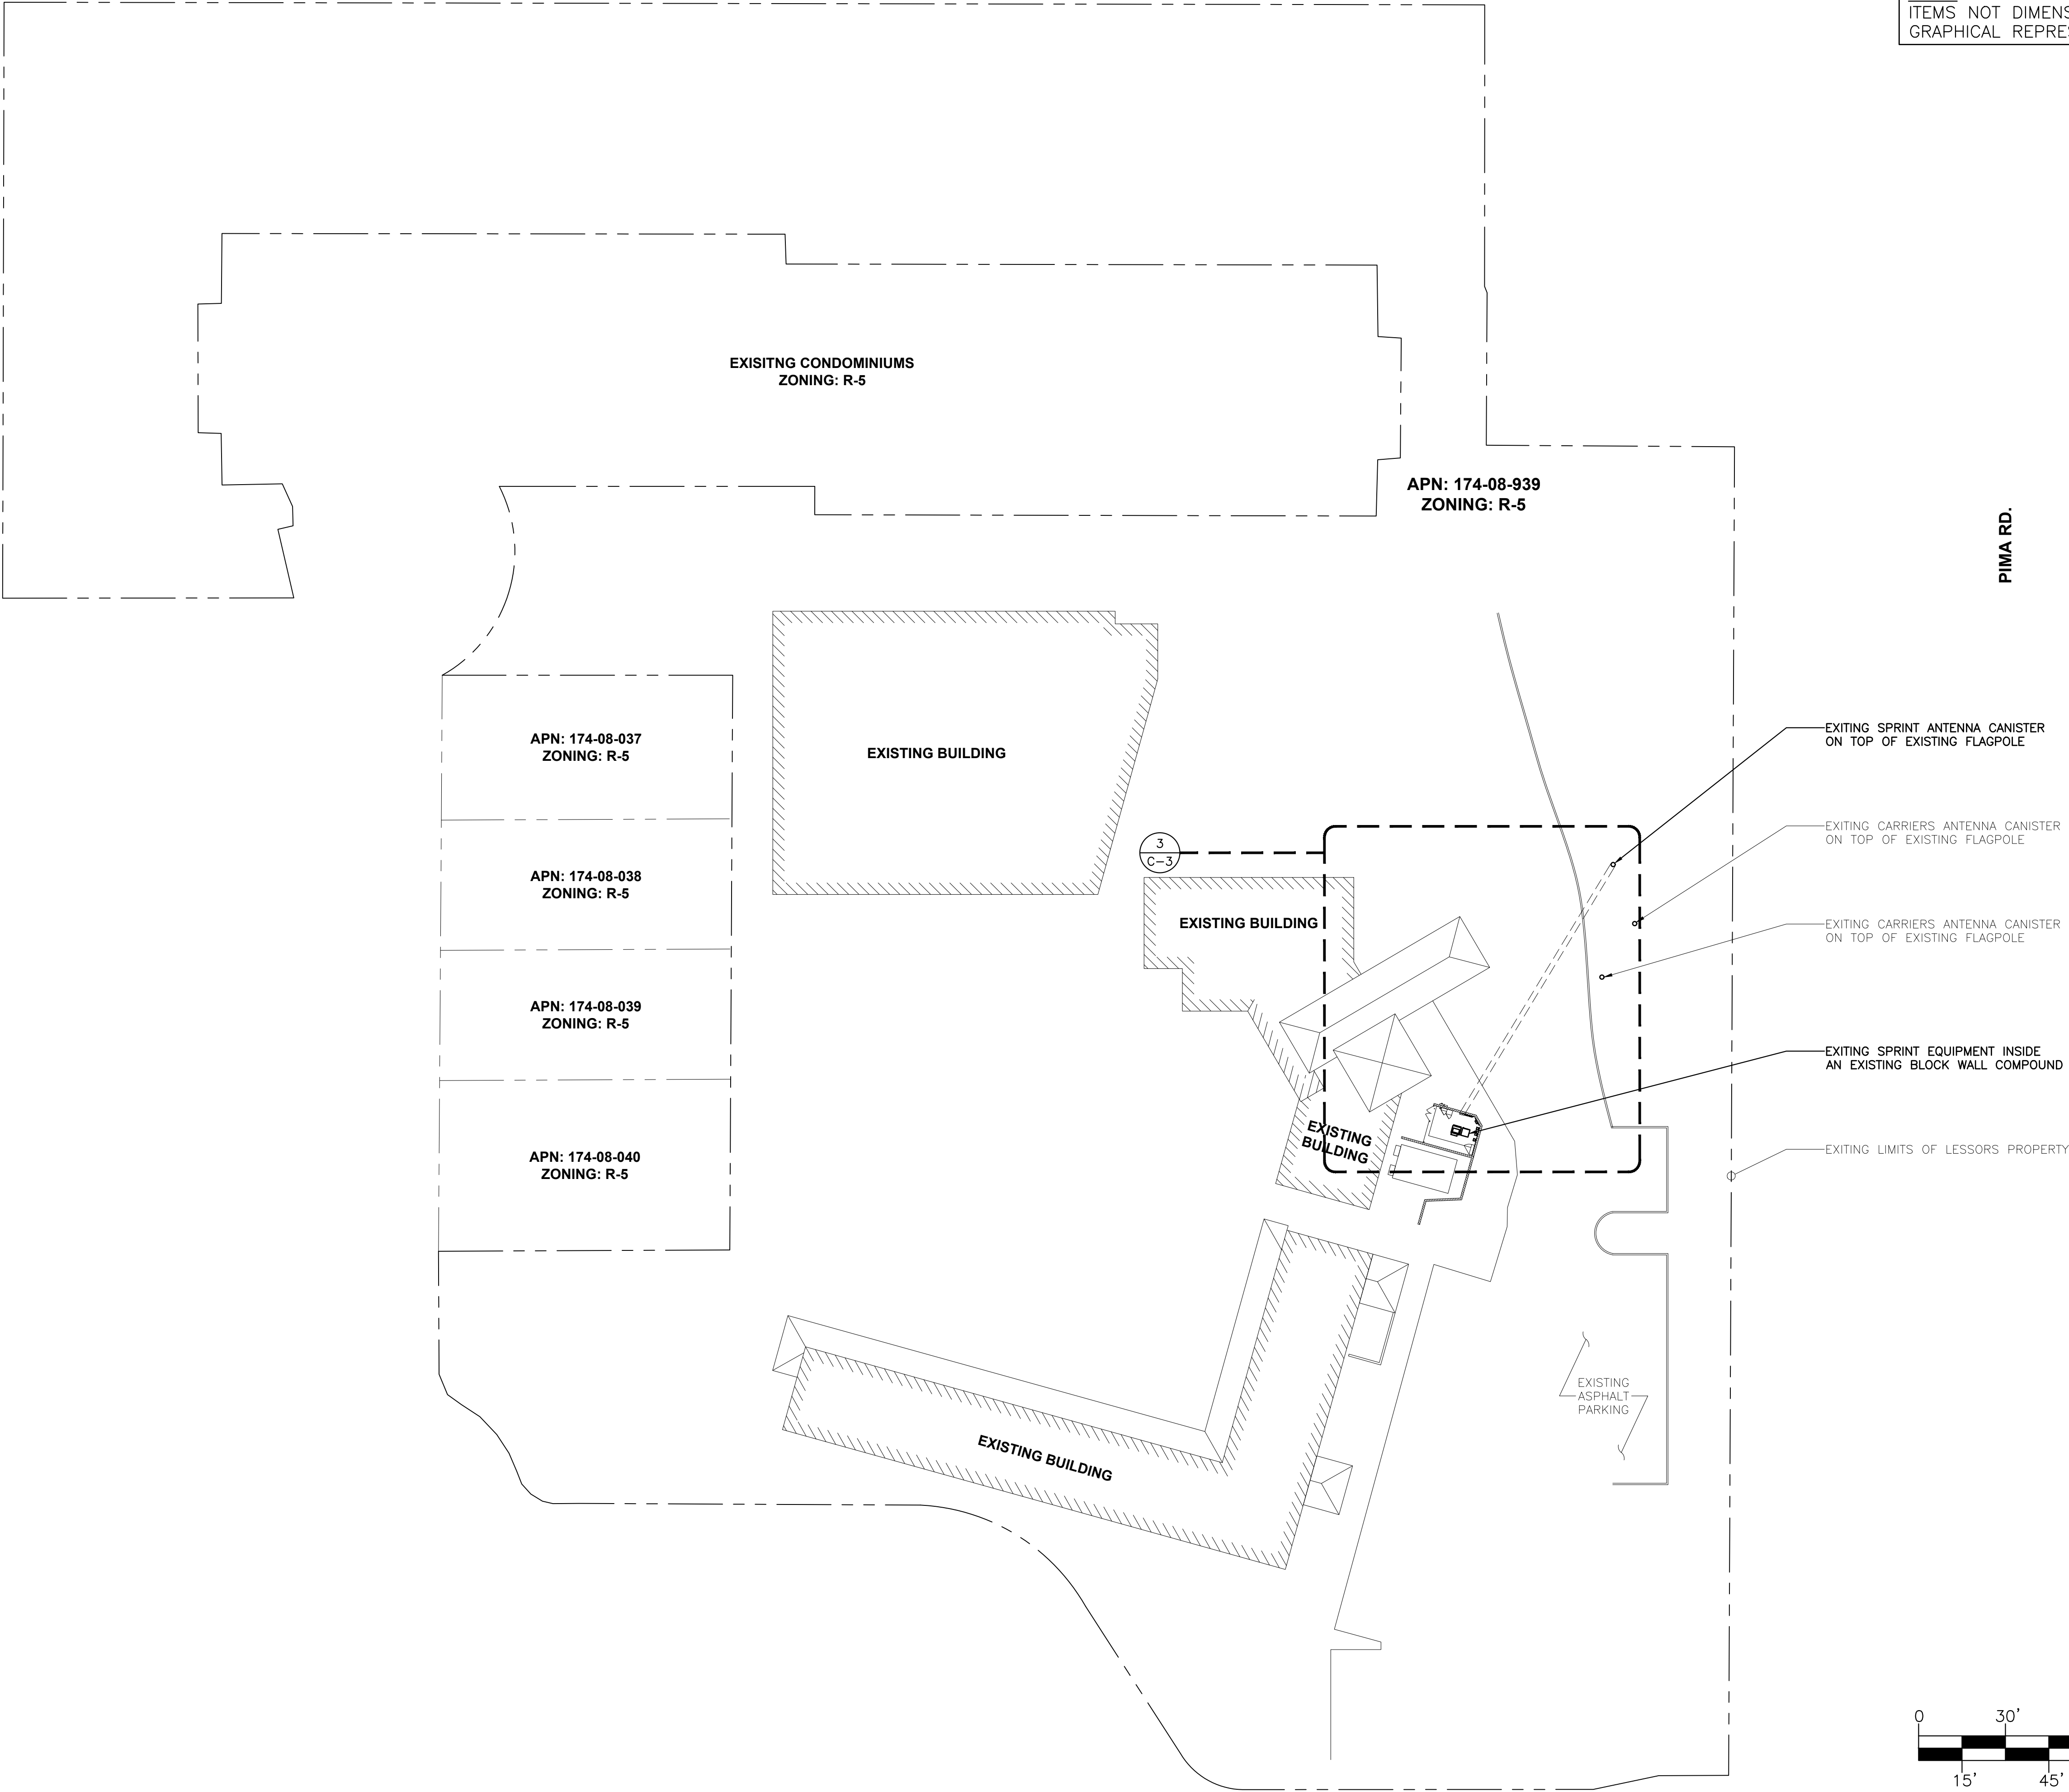

NOTE:
ITEMS NOT DIMENSIONED ARE FOR
GRAPHICAL REPRESENTATION ONLY

PLANS PREPARED FOR



CONSULTANT



2166 E. UNIVERSITY DR., STE 201
TEMPE, ARIZONA 85281
PHONE: (602) 429-0533 FAX: (480) 638-2852

ENGINEER OF RECORD

TERRA DYNAMIC ENGINEERING, LLC



P.O. BOX 22131, PHOENIX, AZ 85028
PHONE: (602) 482-1603
EMAIL: ROBERT@TERRADYNAMIC.US



Roberto Orlando

NO.	DATE	DESCRIPTION	BY
1	05/08/19	REVIEW	SPE
2	05/14/19	REVISION 1	SPE
3	05/21/19	REVISION 2	SPE
4	05/23/19	SUBMITTAL	SPE

PROJECT INFORMATION

JOB: 01-235-04

PH60XC104
DAYS INN
AND SUITES

7330 N. PIMA RD.
SCOTTSDALE, ARIZONA 85258


SHEET TITLE

SITE PLAN

SHEET NUMBER


C-1

SITE PLAN





SCALE: 1" = 30'-0"

1

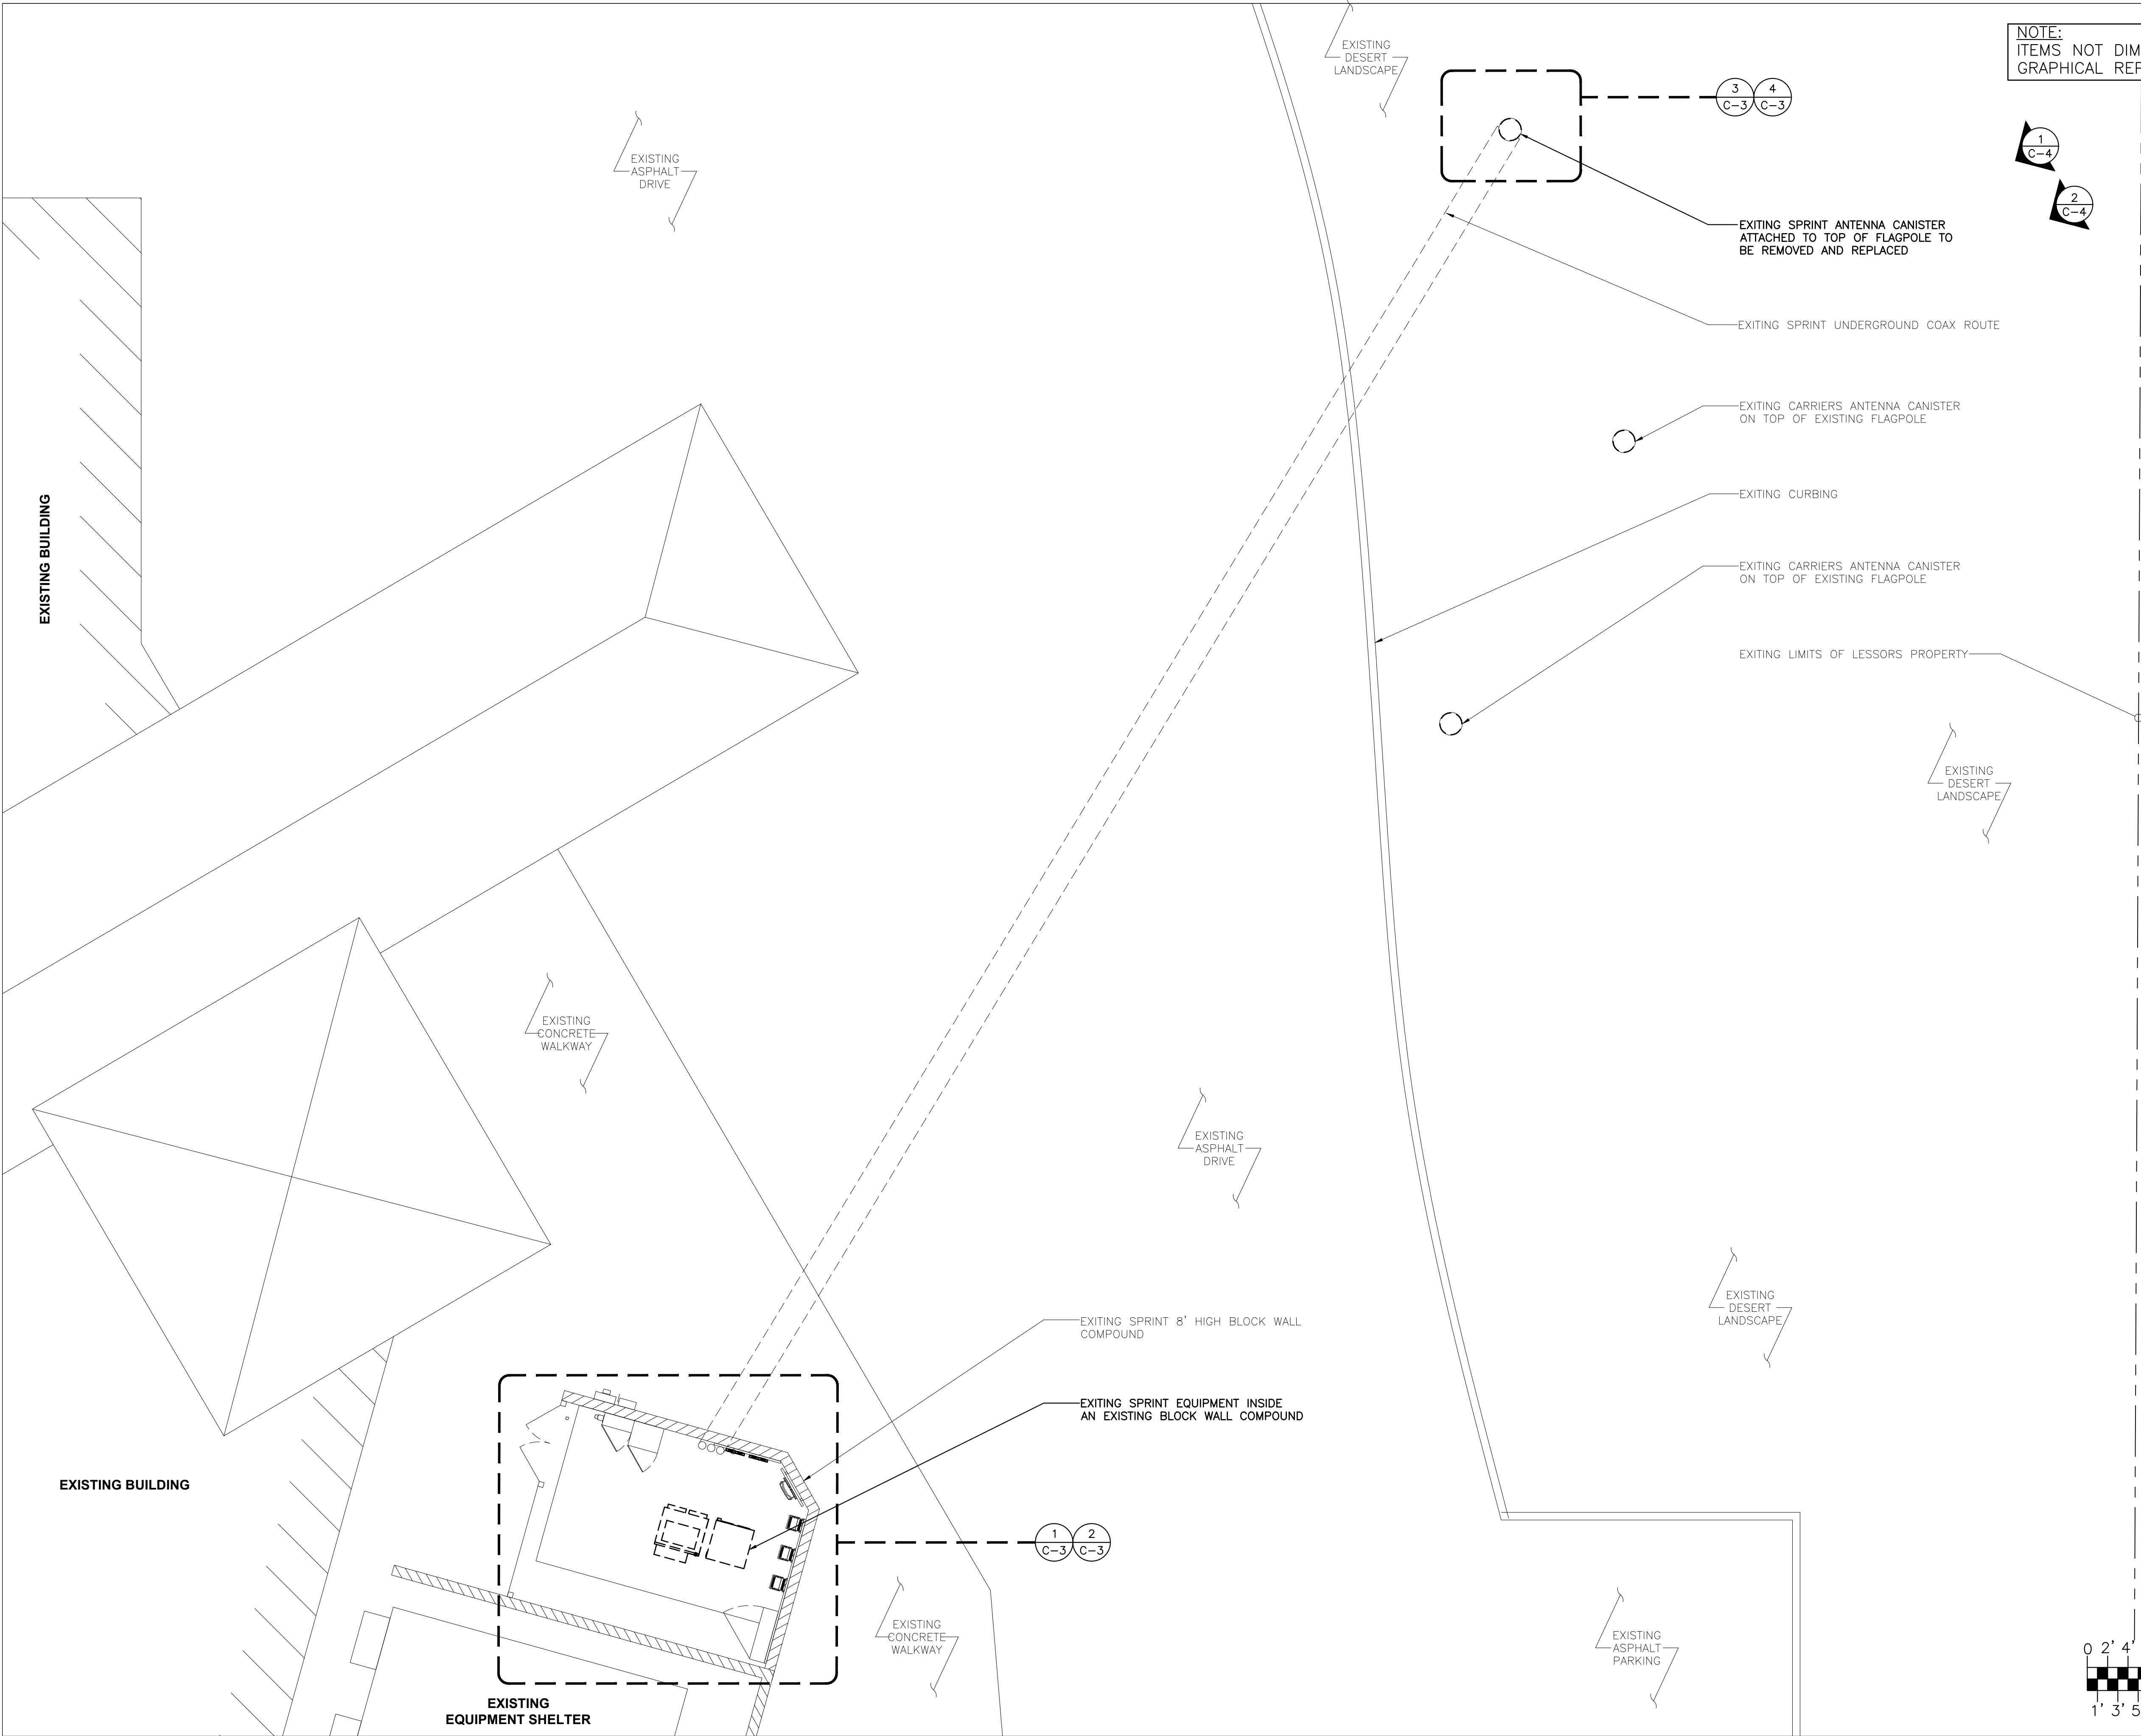

NOTE:
ITEMS NOT DIMENSIONED ARE FOR
GRAPHICAL REPRESENTATION ONLY

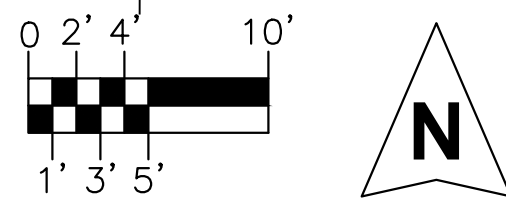

PLANS PREPARED FOR

Sprint 
Together with Nextel.

CONSULTANT



**COAL CREEK
CONSULTING**

2166 E. UNIVERSITY DR., STE 201
TEMPE, ARIZONA 85281
PHONE: (602) 429-0533 FAX: (480) 638-2852

ENGINEER OF RECORD

TERRA DYNAMIC ENGINEERING, LLC

P.O. BOX 22131, PHOENIX, AZ 85028
PHONE: (602) 482-1603
EMAIL: ROBERT@TERRADYNAMIC.US

NO.	DATE	DESCRIPTION	BY
1	05/08/19	REVIEW	SPE
2	05/14/19	REVISION 1	SPE
3	05/21/19	REVISION 2	SPE
4	05/23/19	SUBMITTAL	SPE

PROJECT INFORMATION

JOB: 01-235-04

PH60XC104
DAYS INN
AND SUITES


7330 N. PIMA RD.
SCOTTSDALE, ARIZONA 85258

SHEET TITLE

SITE PLAN


SHEET NUMBER

C-2

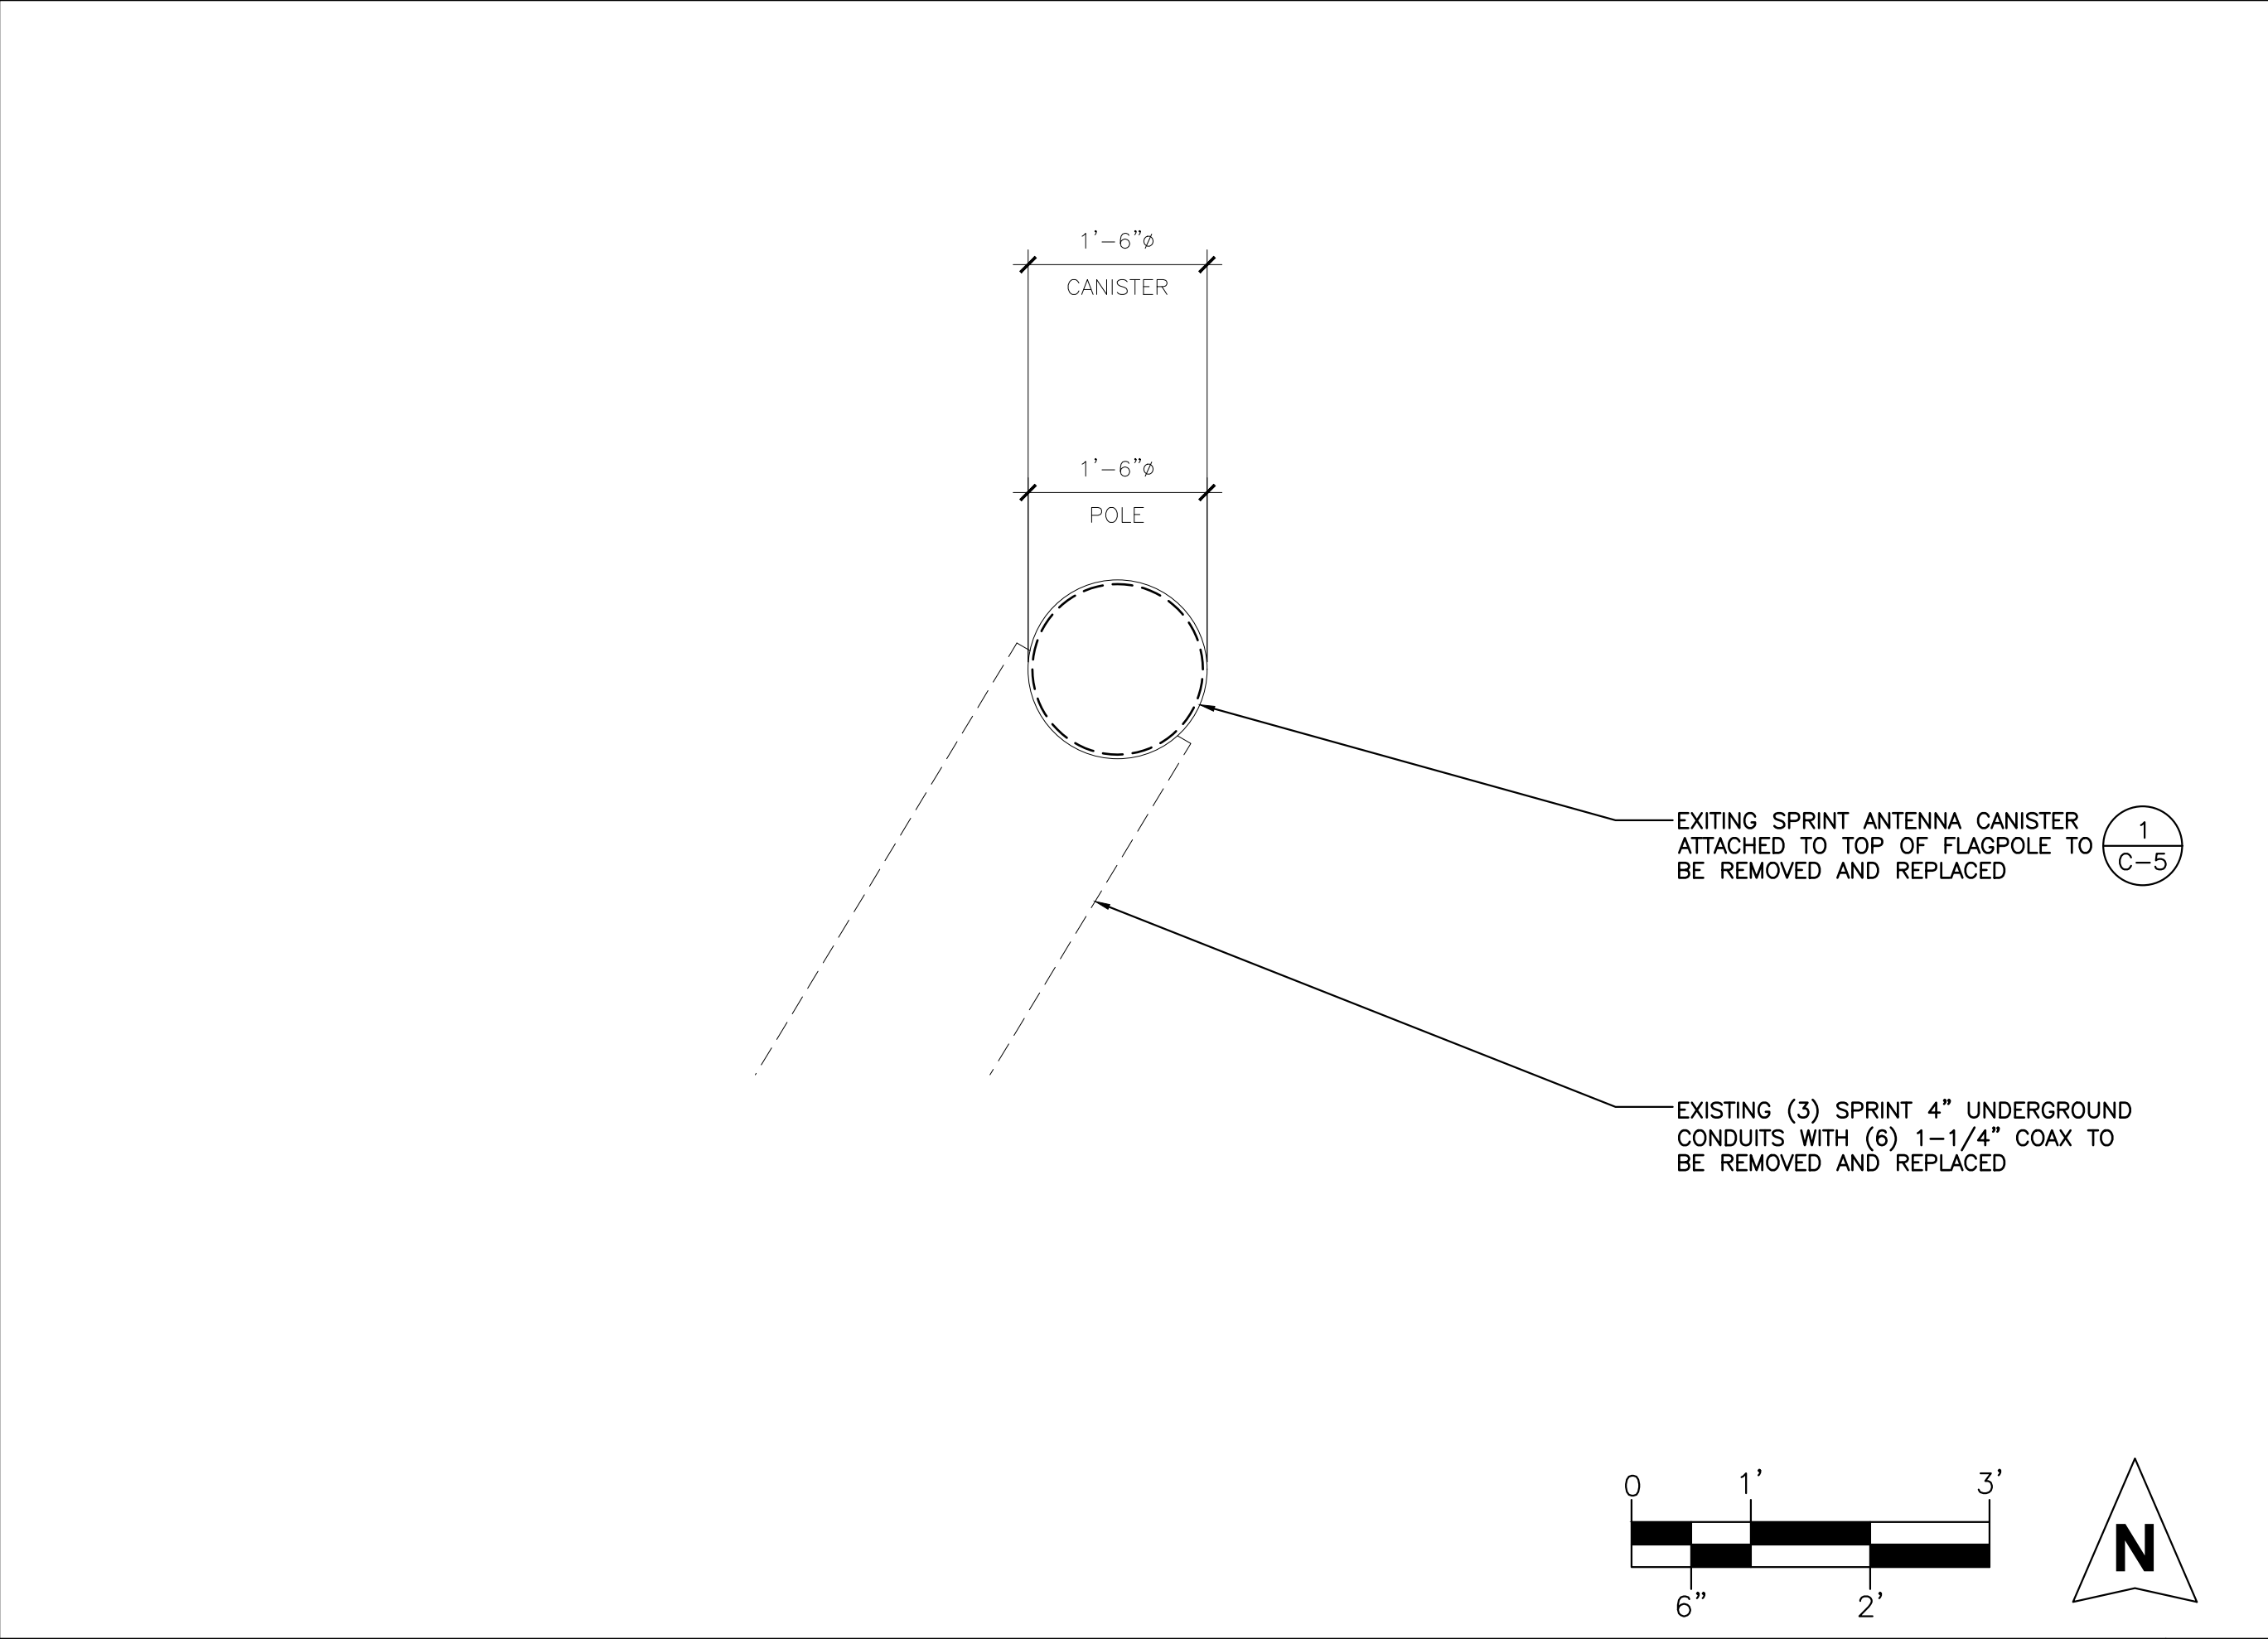


EXISTING ANTENNA PLAN

SCALE: 3/4" = 1'-0" 3

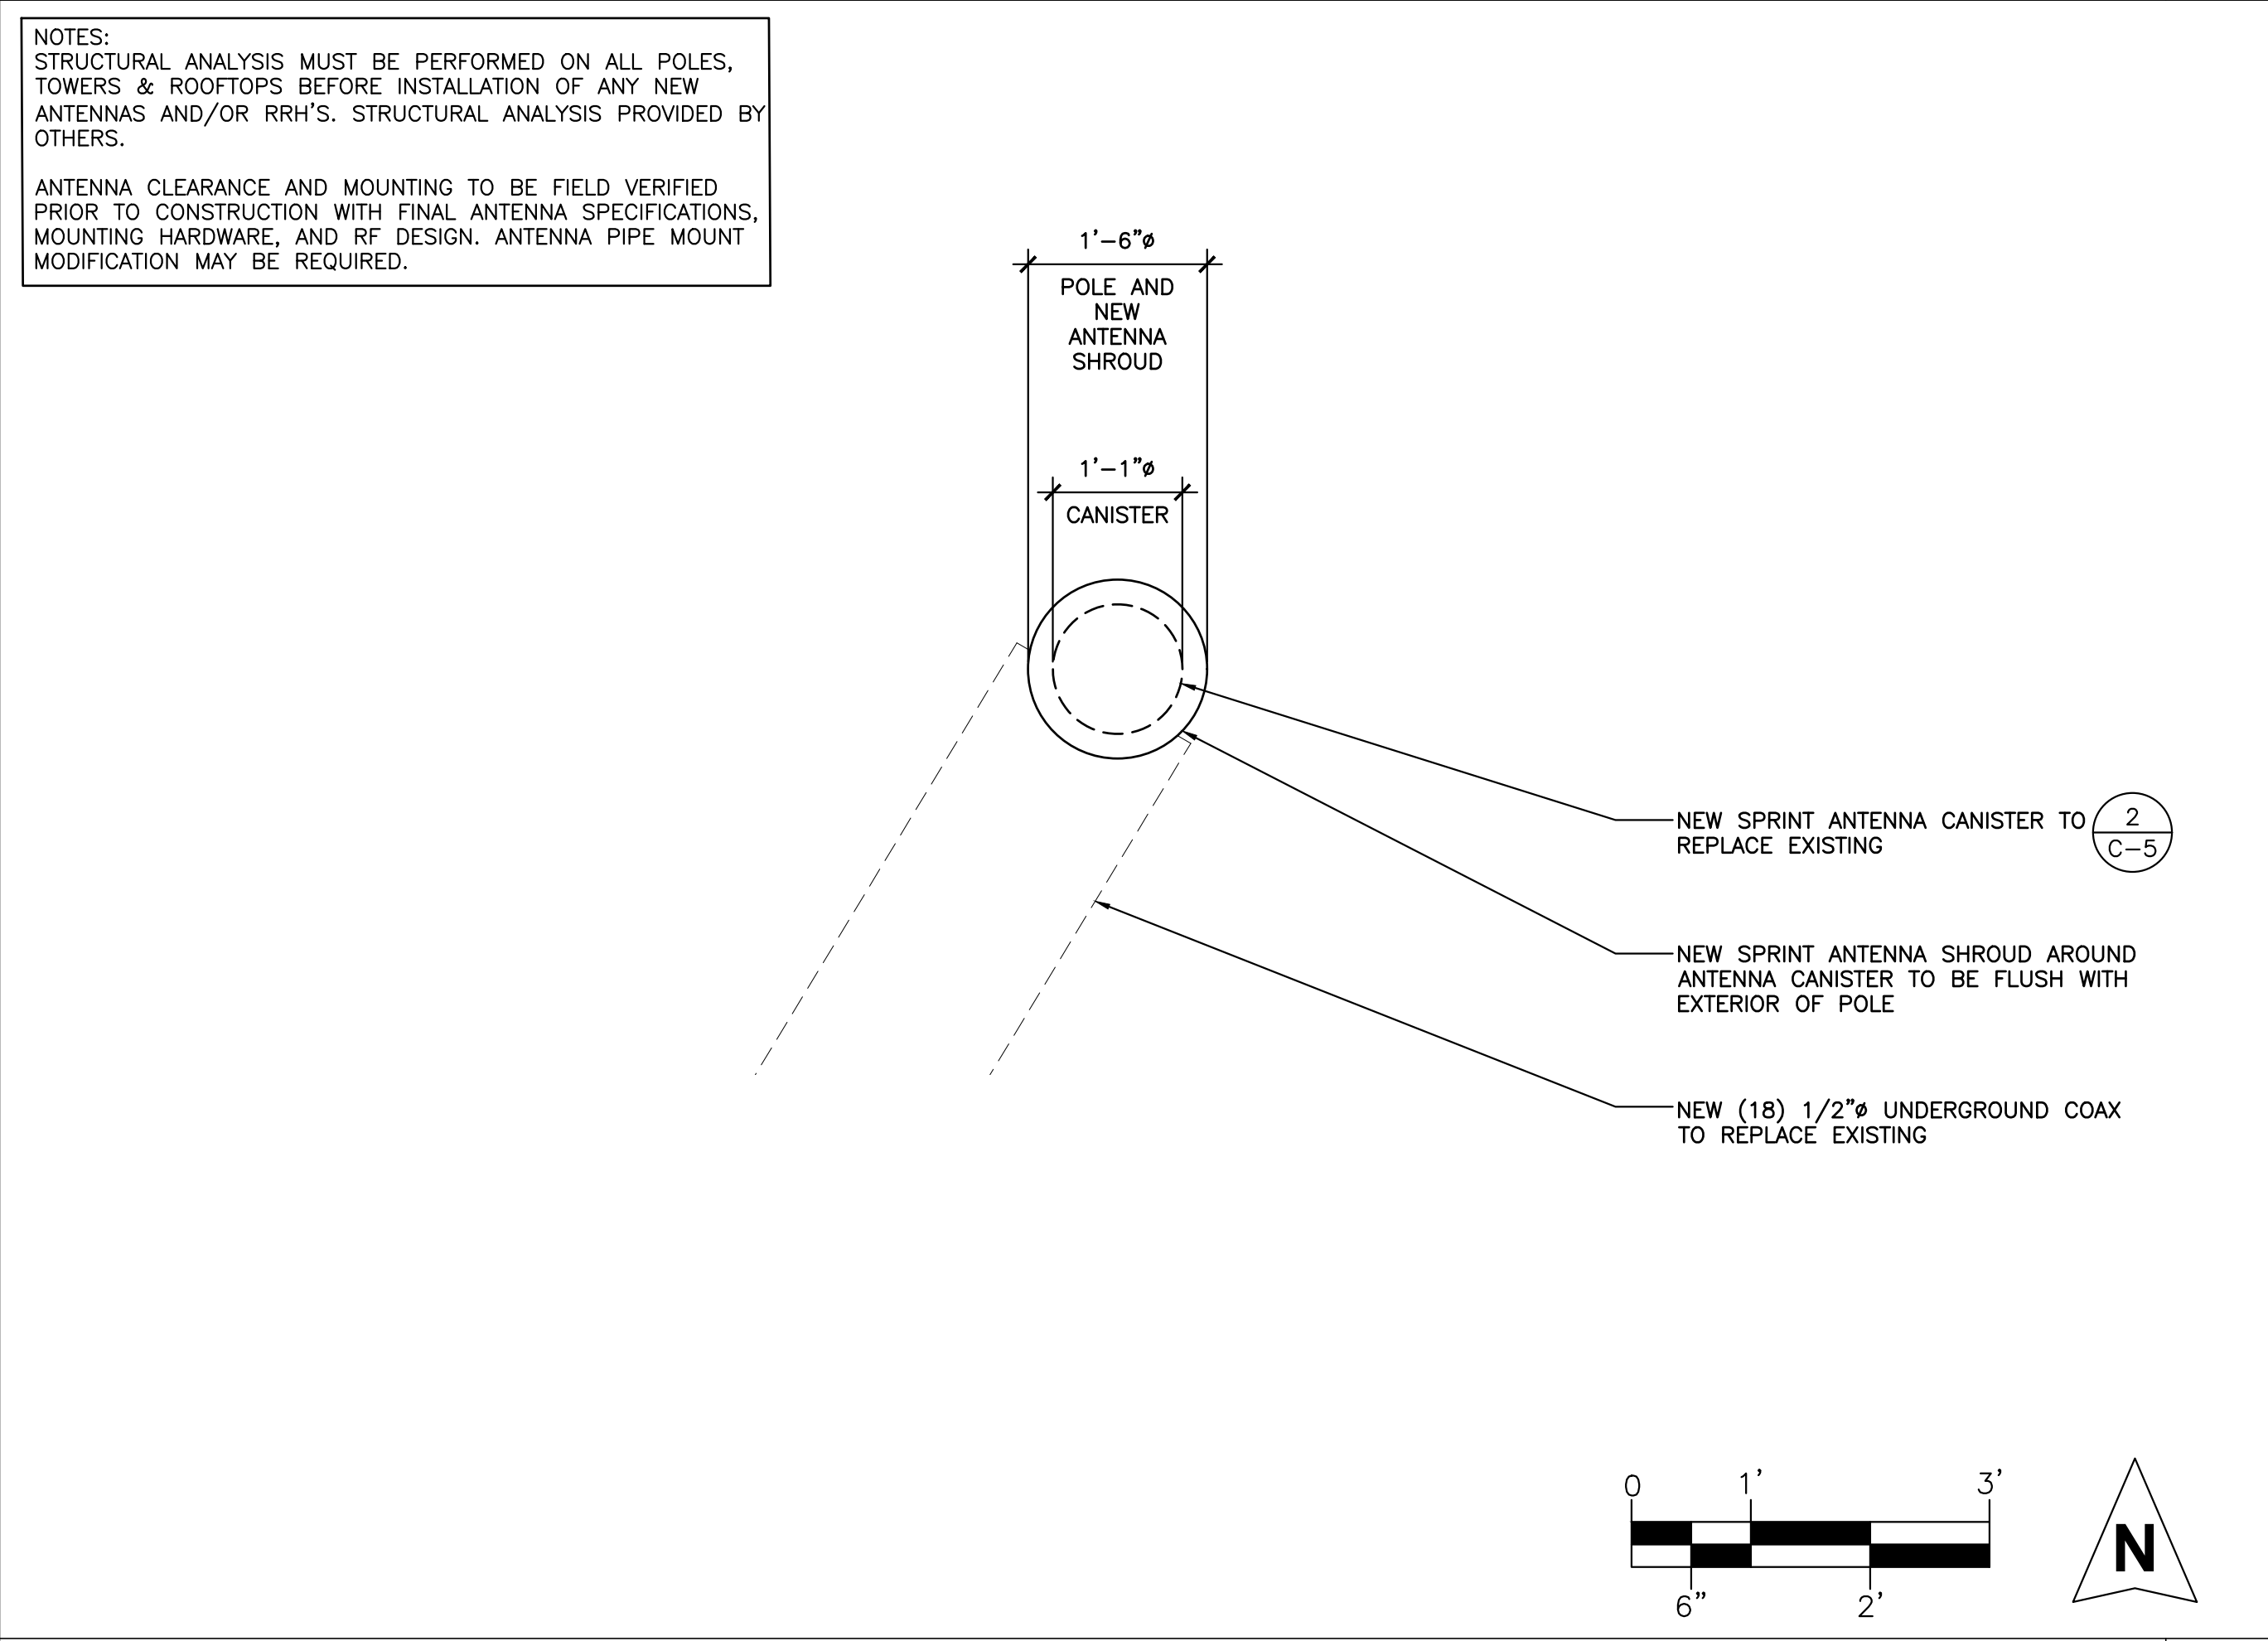


FINAL ANTENNA PLAN

SCALE: 3/4" = 1'-0" 4

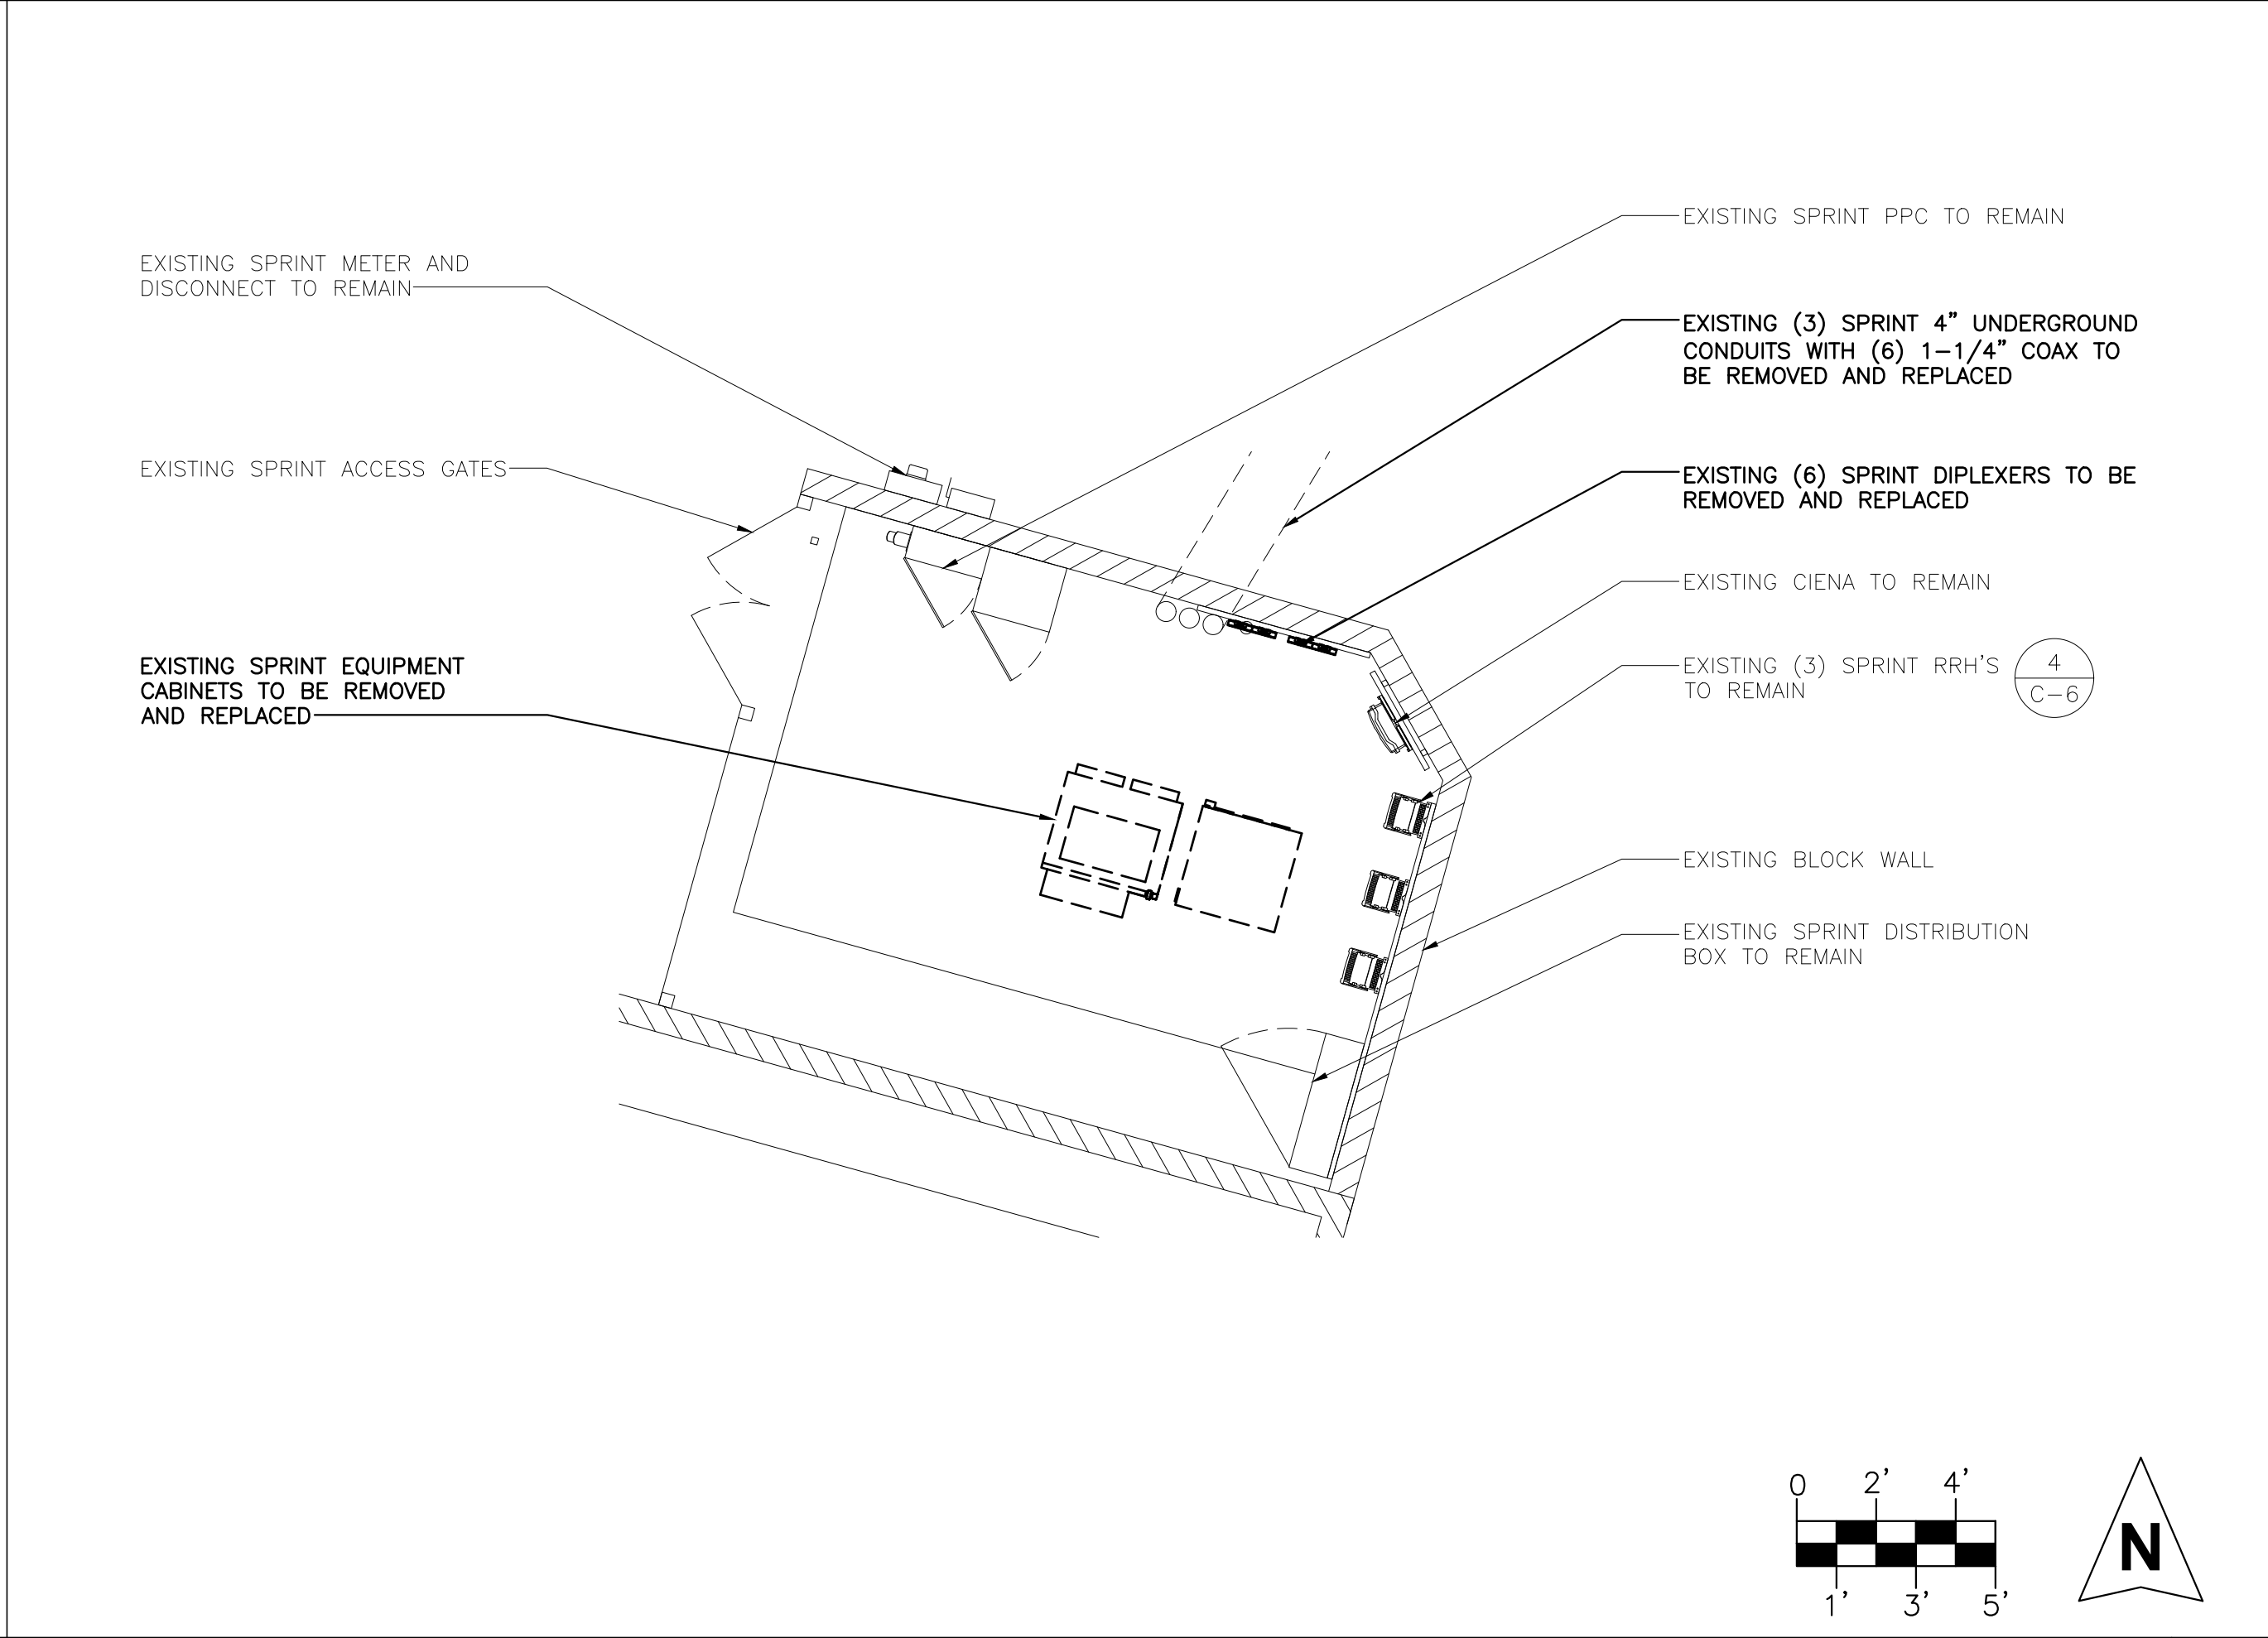

EXISTING EQUIPMENT PLAN

SCALE: 1/4" = 1'-0" 1

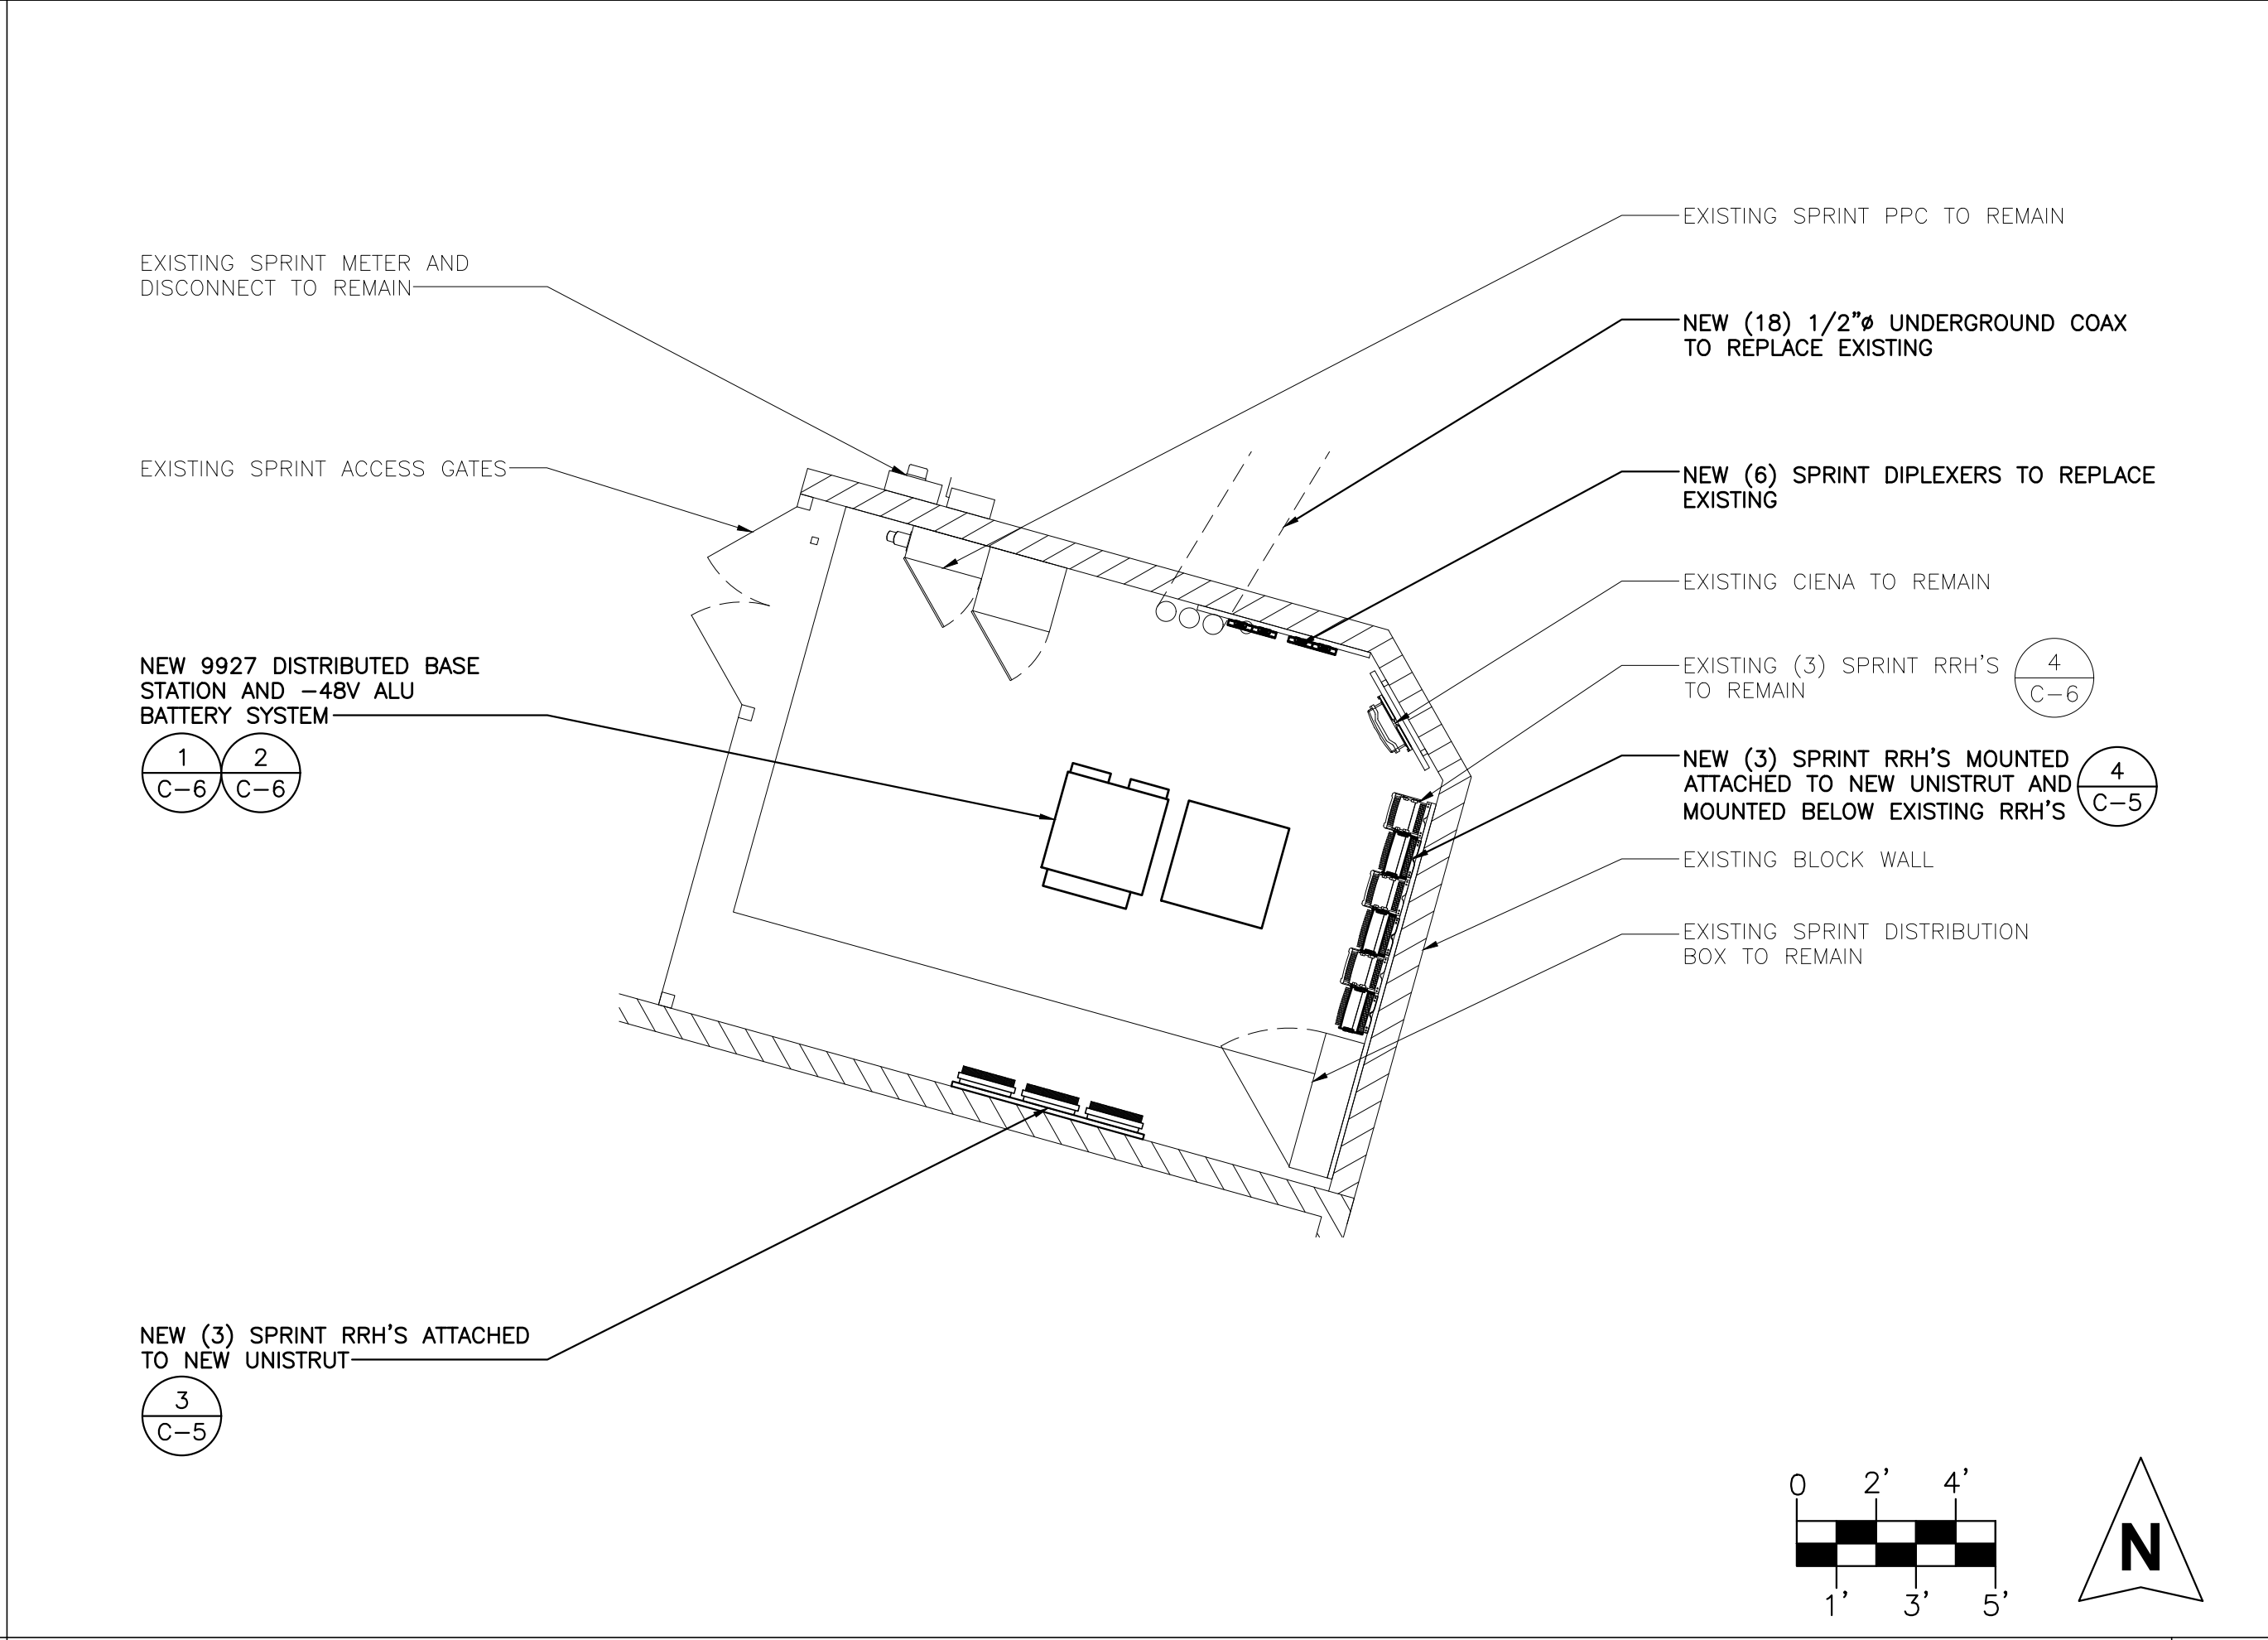

FINAL EQUIPMENT PLAN

SCALE: 1/4" = 1'-0" 2

PLANS PREPARED FOR

Sprint Together with Nextel.

CONSULTANT

COAL CREEK CONSULTING
2166 E. UNIVERSITY DR., STE 201
TEMPE, ARIZONA 85281
PHONE: (602) 429-0533 FAX: (480) 638-2852

ENGINEER OF RECORD

TERRA DYNAMIC ENGINEERING, LLC
P.O. BOX 22131, PHOENIX, AZ 85028
PHONE: (602) 482-1603
EMAIL: ROBERT@TERRADYNAMIC.US

NO.	DATE	DESCRIPTION	BY
1	05/08/19	REVIEW	SPE
2	05/14/19	REVISION 1	SPE
3	05/21/19	REVISION 2	SPE
4	05/23/19	SUBMITTAL	SPE

PROJECT INFORMATION

JOB: 01-235-04

PH60XC104
DAYS INN
AND SUITES

7330 N. PIMA RD.
SCOTTSDALE, ARIZONA 85258


SHEET TITLE

EXISTING/NEW
EQUIPMENT AND
ANTENNA PLAN

SHEET NUMBER

C-3

MANUFACTURE: ALCATEL-LUCENT
MODEL: RRH # TD-RRH8X20-25

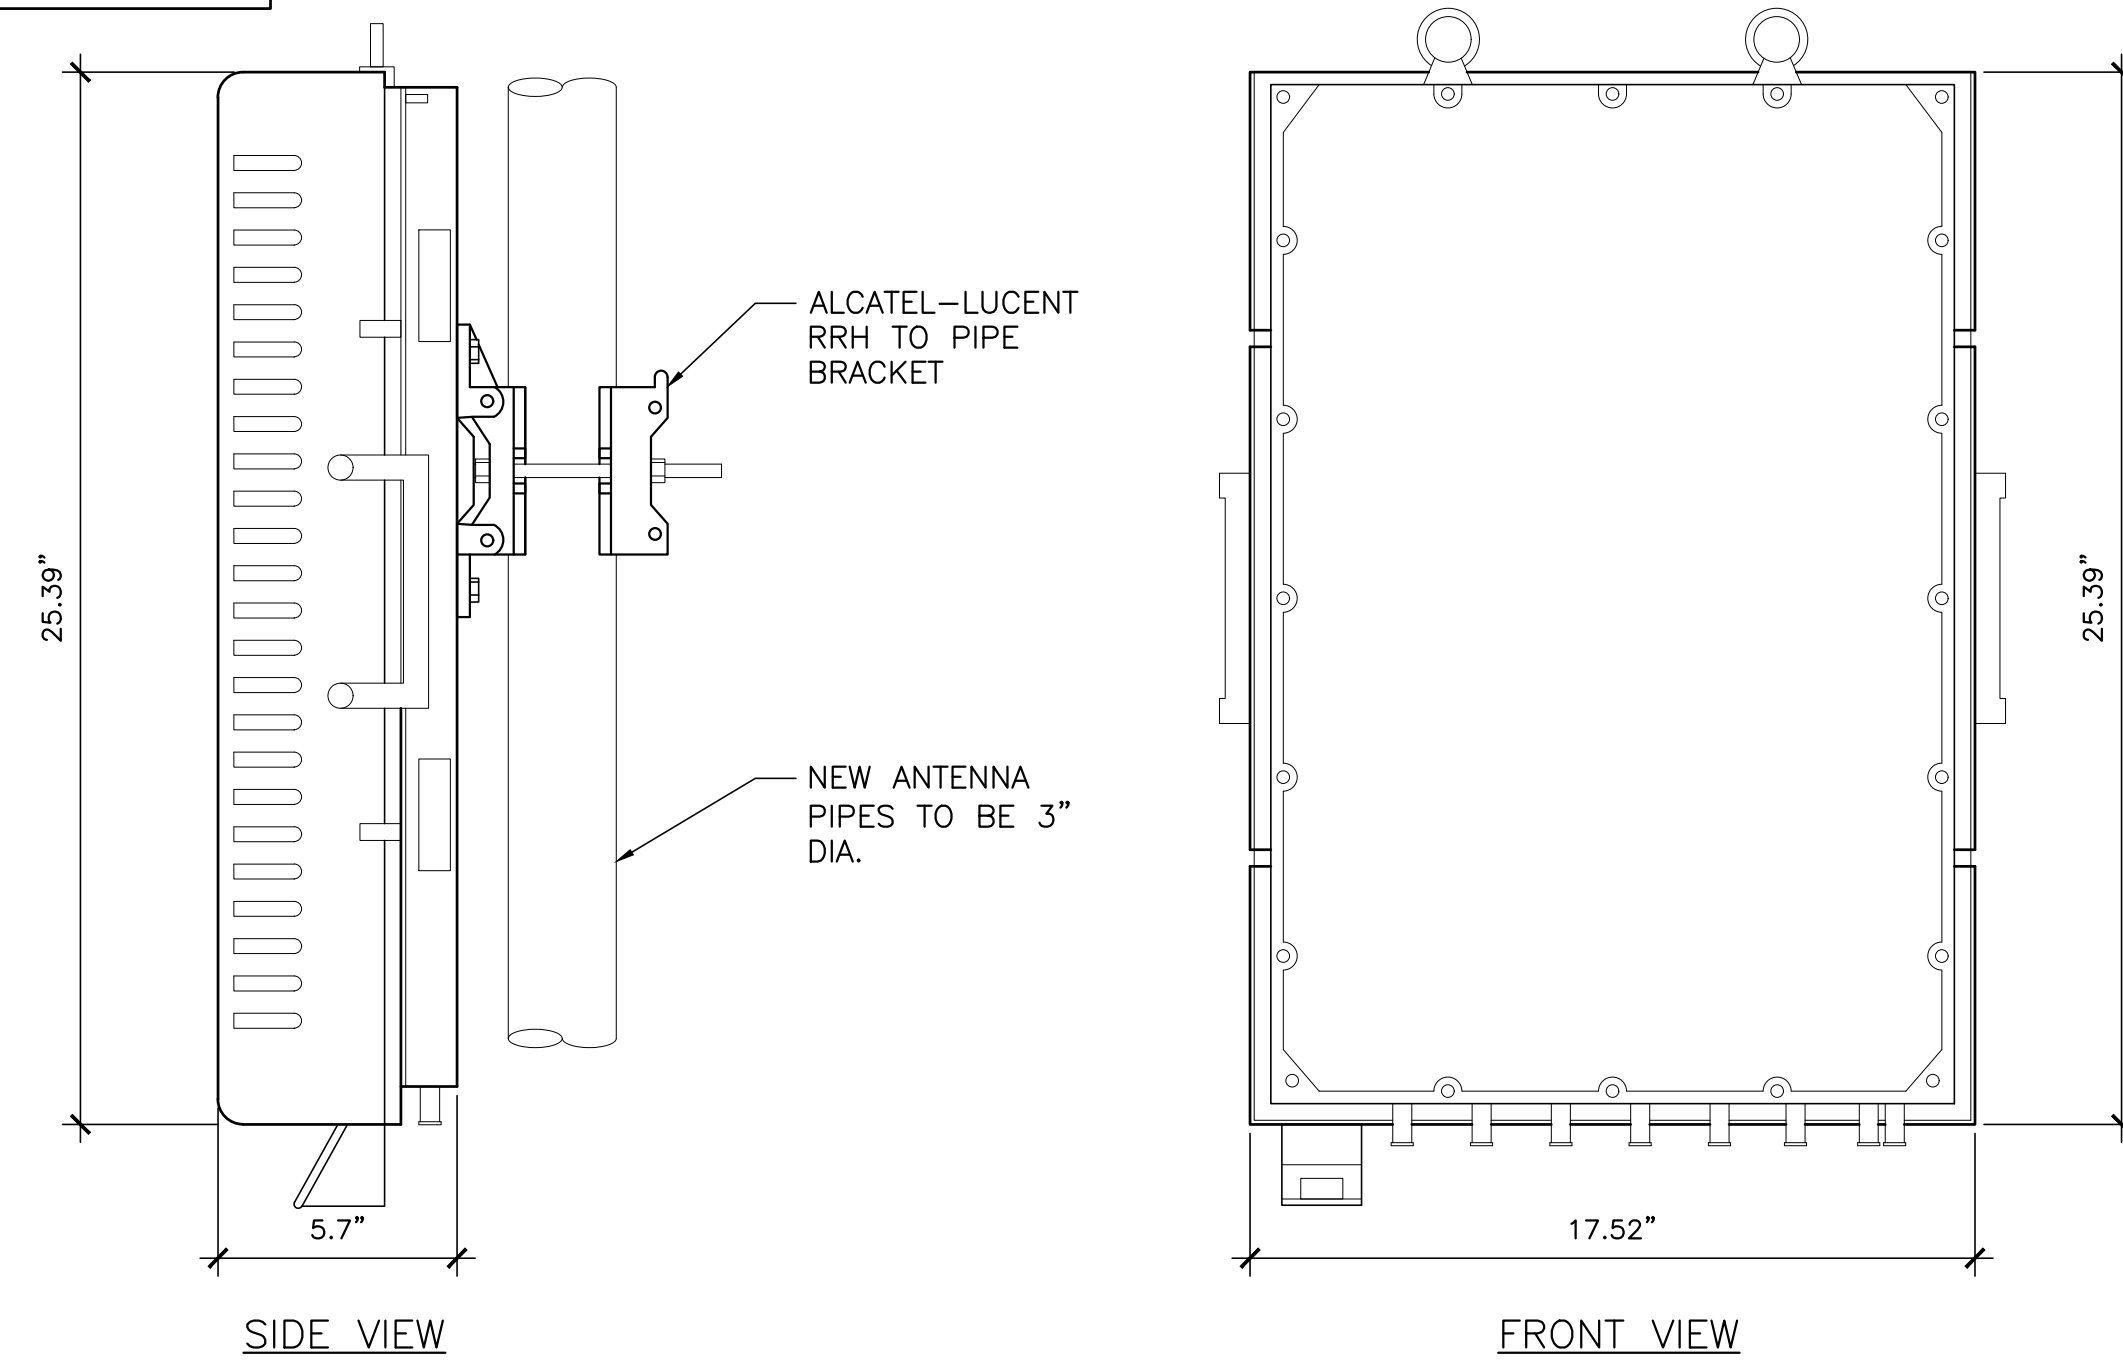

NOTES


COMPLY WITH MANUFACTURERS INSTRUCTIONS TO ENSURE THAT ALL RRH'S RECEIVE ELECTRICAL POWER WITHIN 24 HOURS OF BEING REMOVED FROM THE MANUFACTURER'S PACKAGING. DO NOT OPEN RRH PACKAGES IN THE RAIN.

RRH AND MOUNTING BRACKET DETAIL


SCALE: N.T.S.

3

MANUFACTURER: UNKNOWN
MODEL: UNKNOWN
DIMENSIONS: HxDIA.in: 98.5"x21"Ø
WEIGHT: 95 LBS

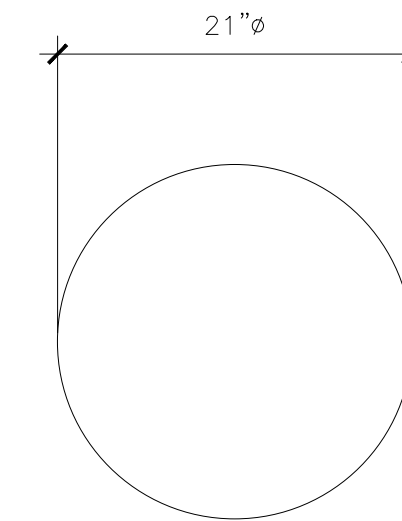

TOP VIEW

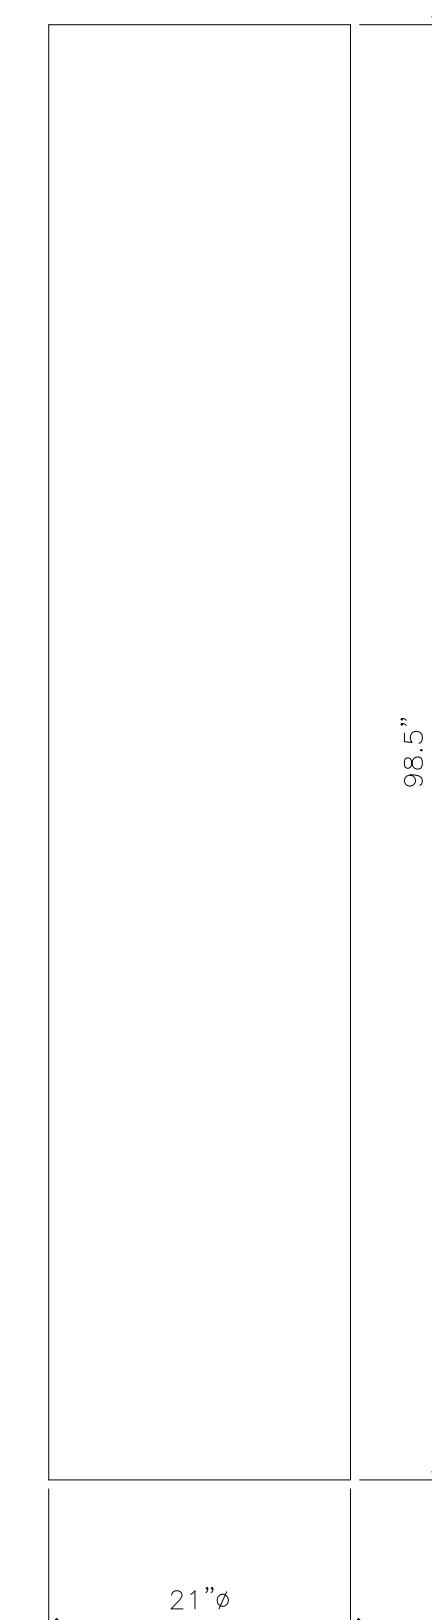

FRONT VIEW

—PLANS PREPARED FOR—



— CONSULTANT —

**COAL CREEK
CONSULTING**

2166 E. UNIVERSITY DR., STE 201
TEMPE, ARIZONA 85281
PHONE: (602) 429-0533 FAX: (480) 638-2852

—ENGINEER OF RECORD—

TERRA DYNAMIC ENGINEERING, LLC



P.O. BOX 22131, PHOENIX, AZ 85028
PHONE: (602) 482-1603
EMAIL: ROBERT@TERRADYNAMIC.US




Robert J. Roberts

NO.	DATE	DESCRIPTION	BY
1	05/08/19	REVIEW	SPE
2	05/14/19	REVISION 1	SPE
3	05/21/19	REVISION 2	SPE
4	05/23/19	SUBMITTAL	SPE

— PROJECT INFORMATION —
JOB: 01-235-04

PH60XC104
DAYS INN
AND SUITES

7330 N. PIMA RD.
SCOTTSDALE, ARIZONA 85258


— SHEET TITLE —

EQUIPMENT DETAILS

— SHEET NUMBER —

C-5

MANUFACTURER: ALCATEL-LUCENT
MODEL: RRH # 800MHZ

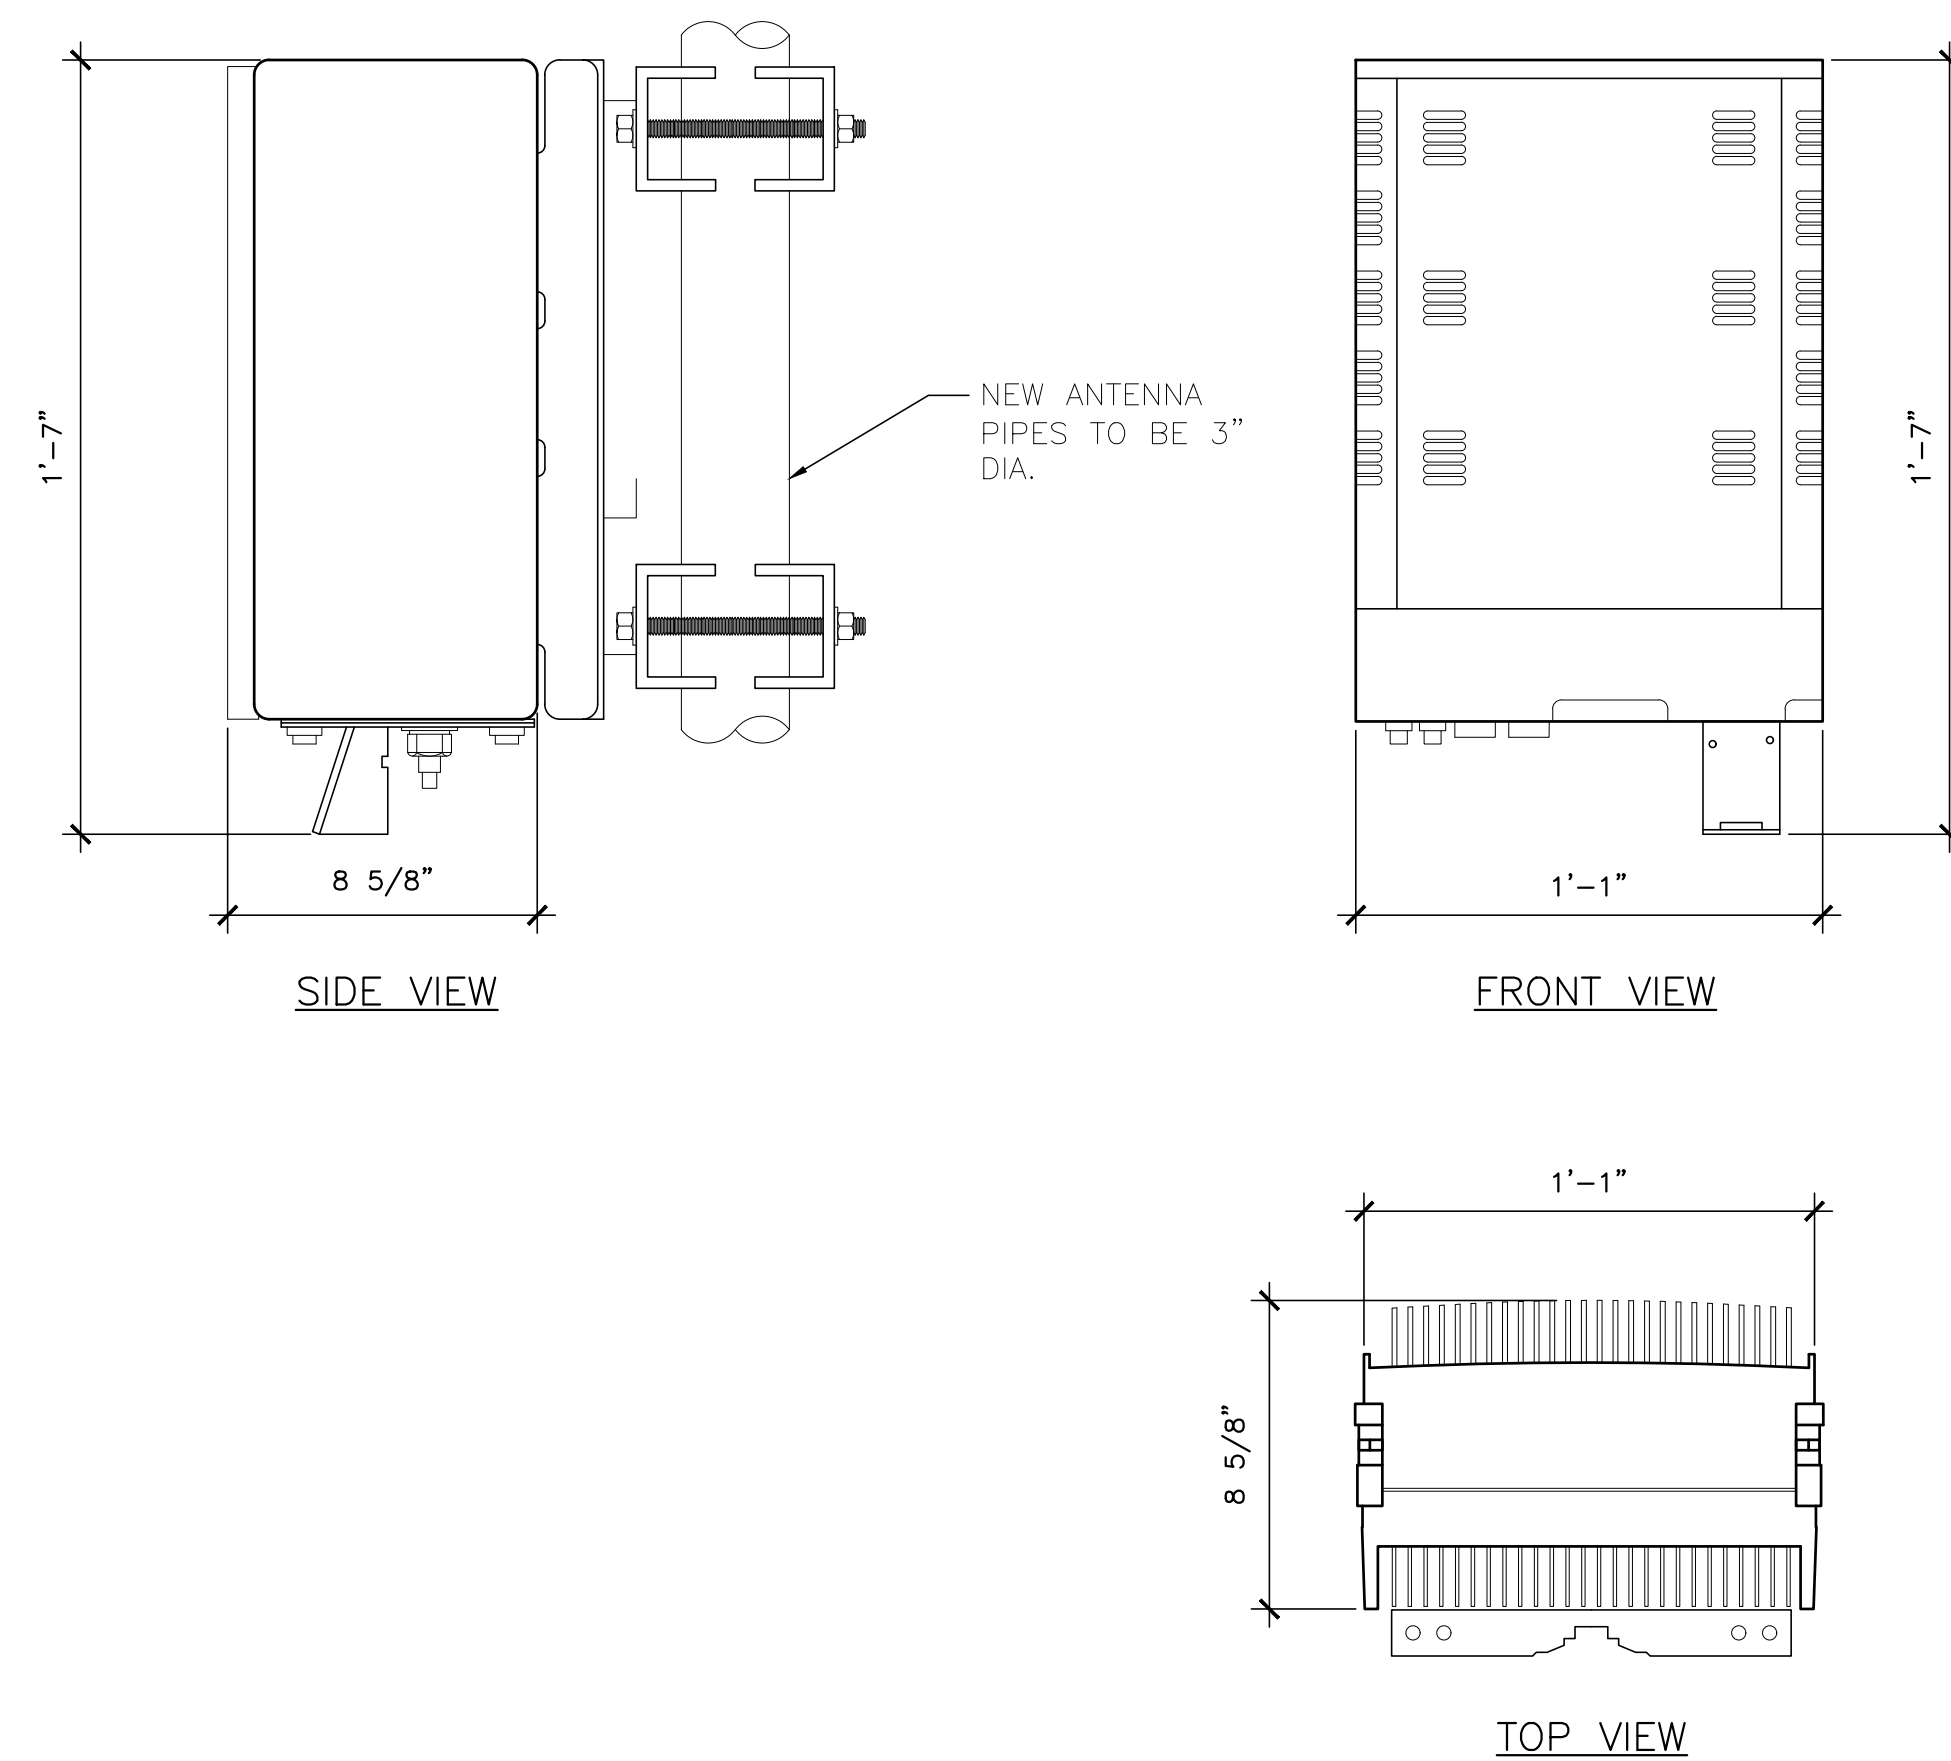


800 RRH DETAIL


SCALE: N.T.S.

4

MANUFACTURER: ALPHA
MODEL: AW3363
DIMENSIONS: HxDIA.in: 108.6"x13.39"Ø
WEIGHT: 95 LBS

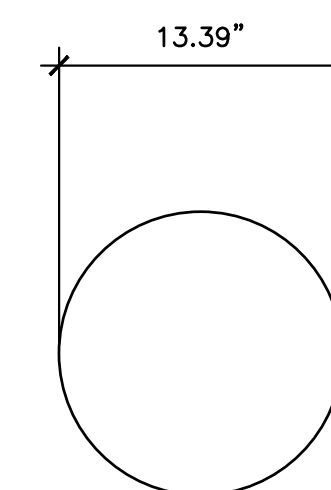

TOP VIEW




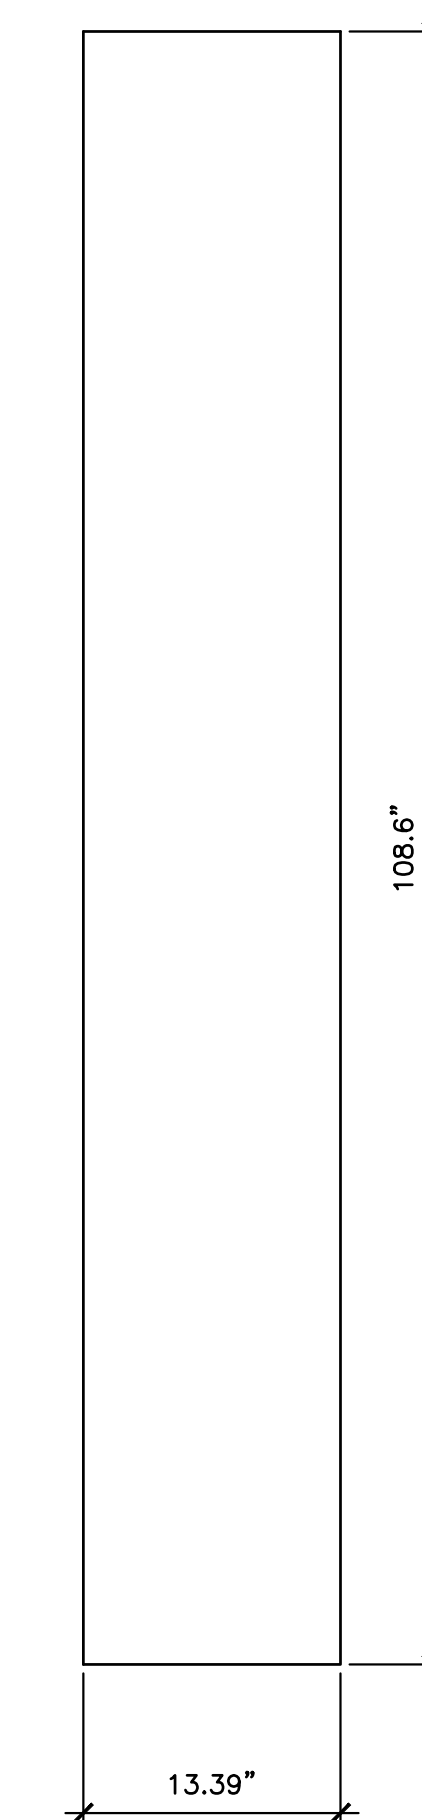


FRONT VIEW

NEW ANTENNA CANISTER

SCALE: N.T.S.

2

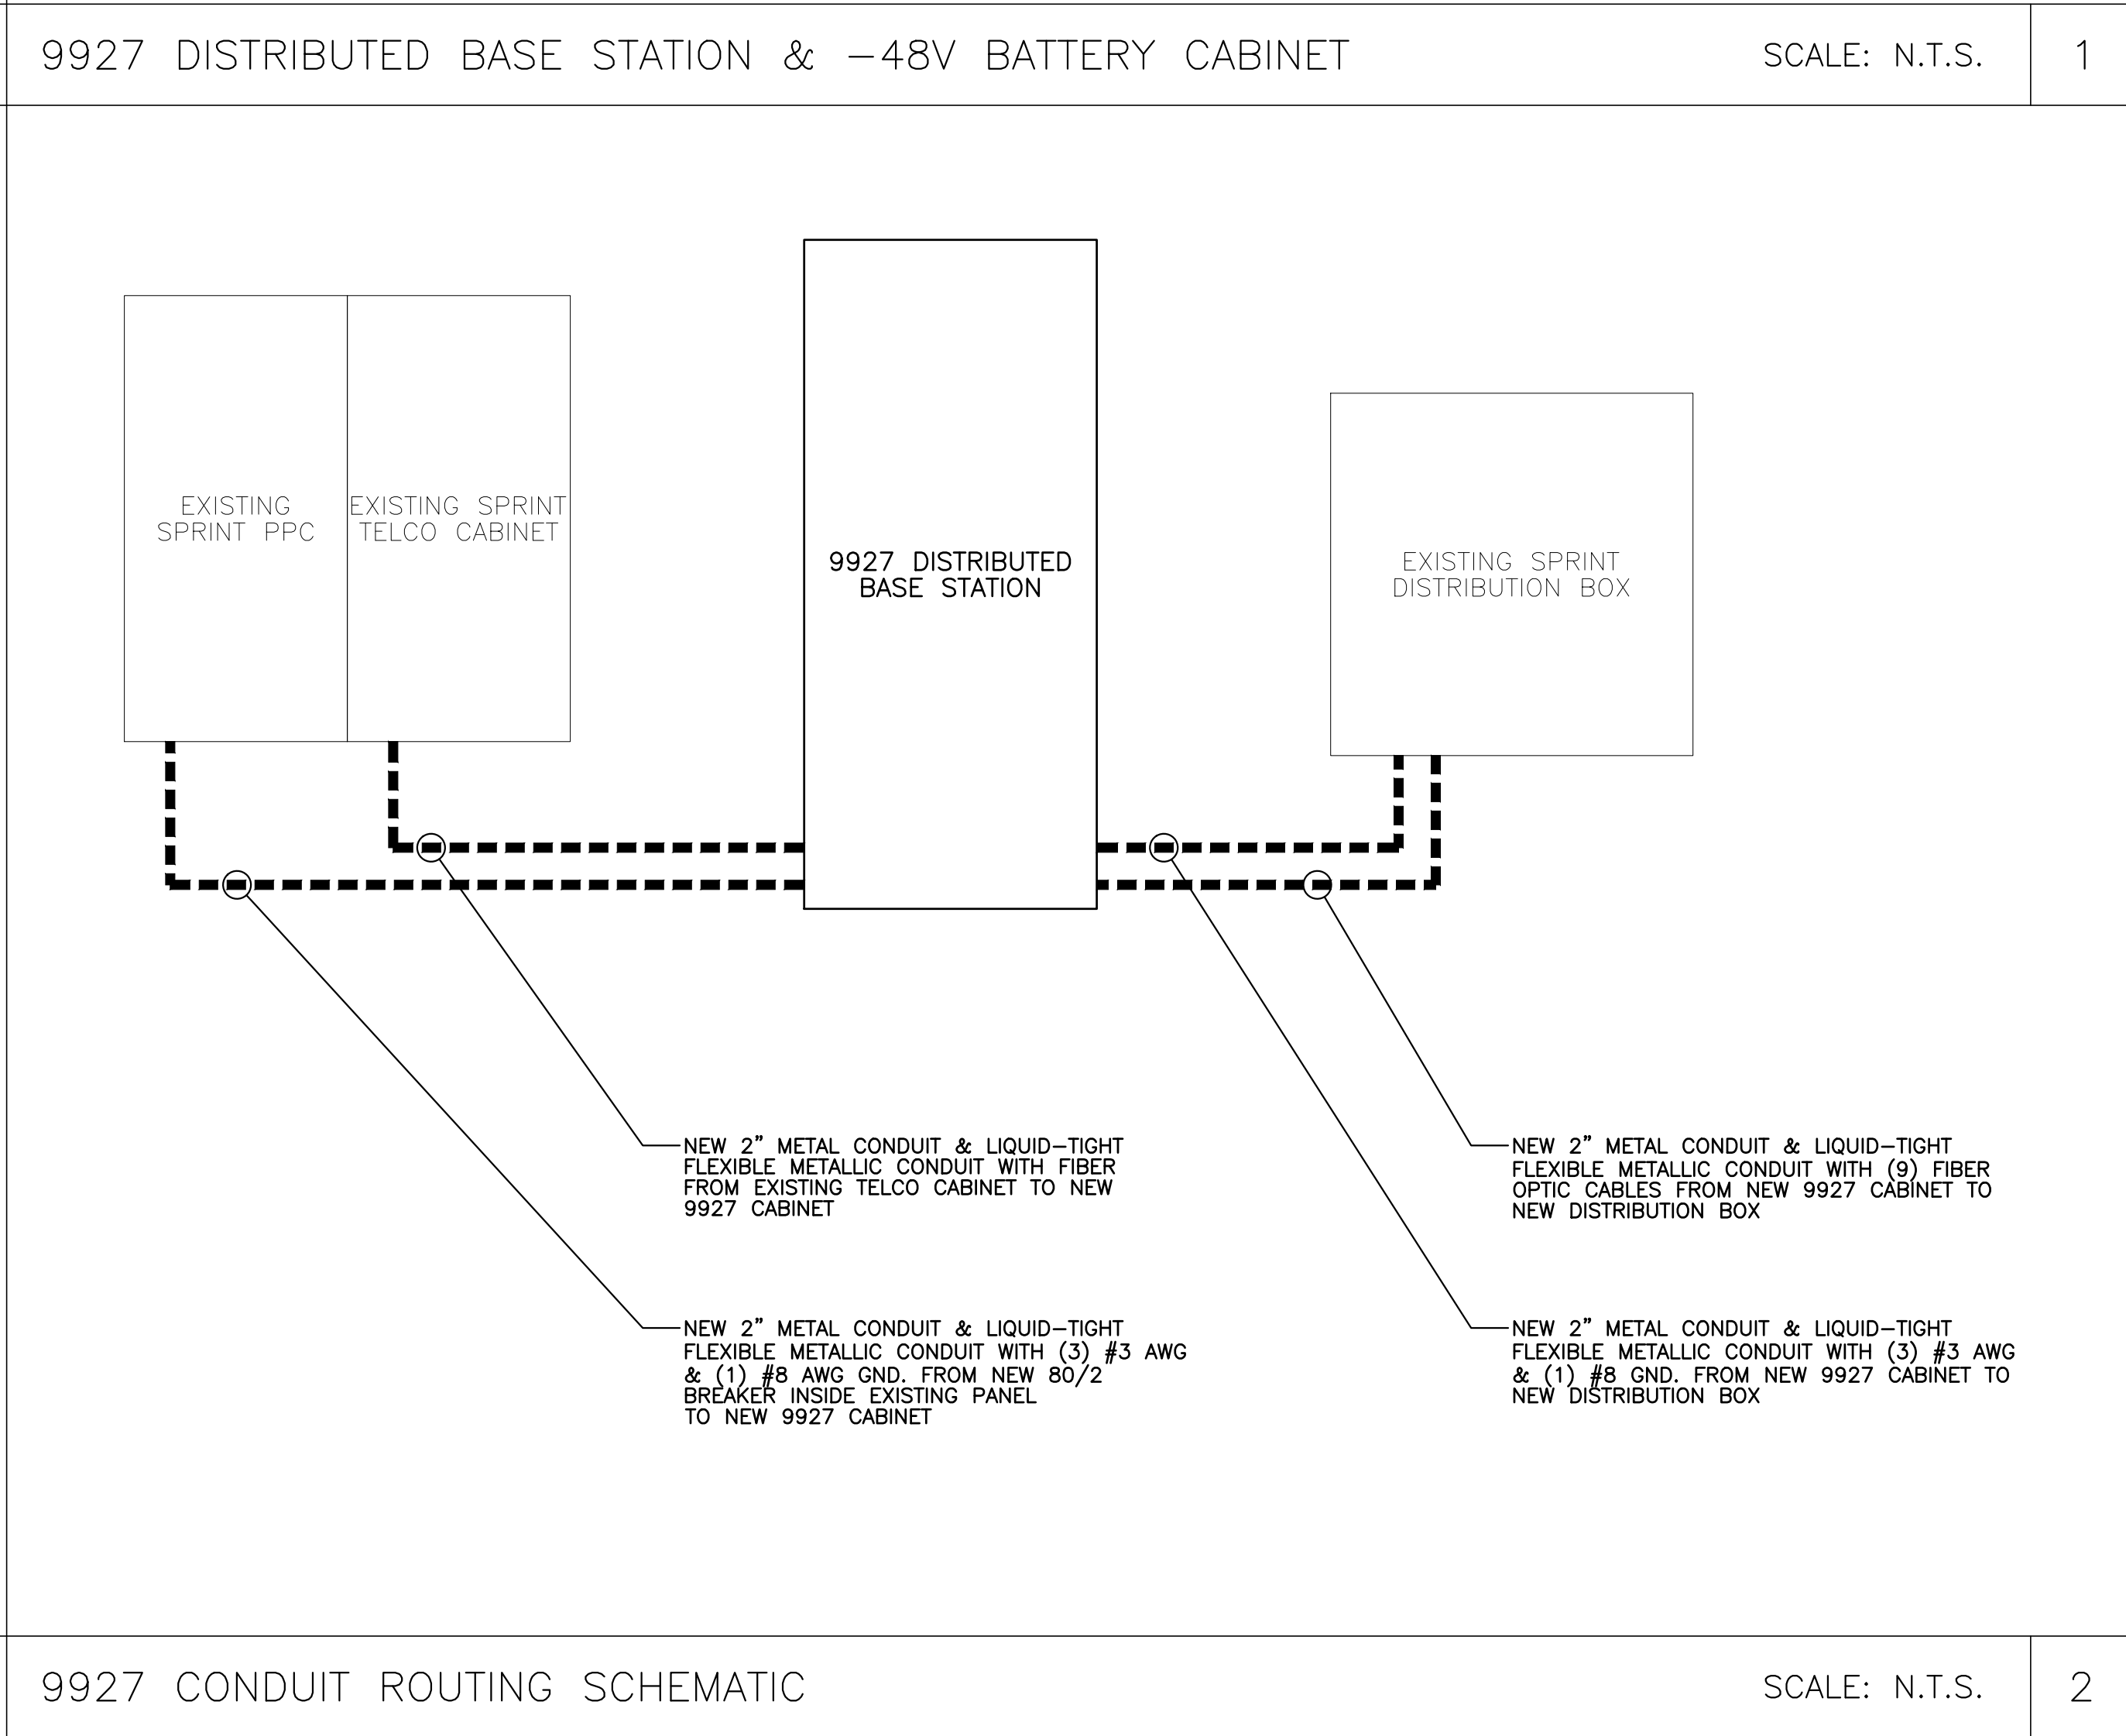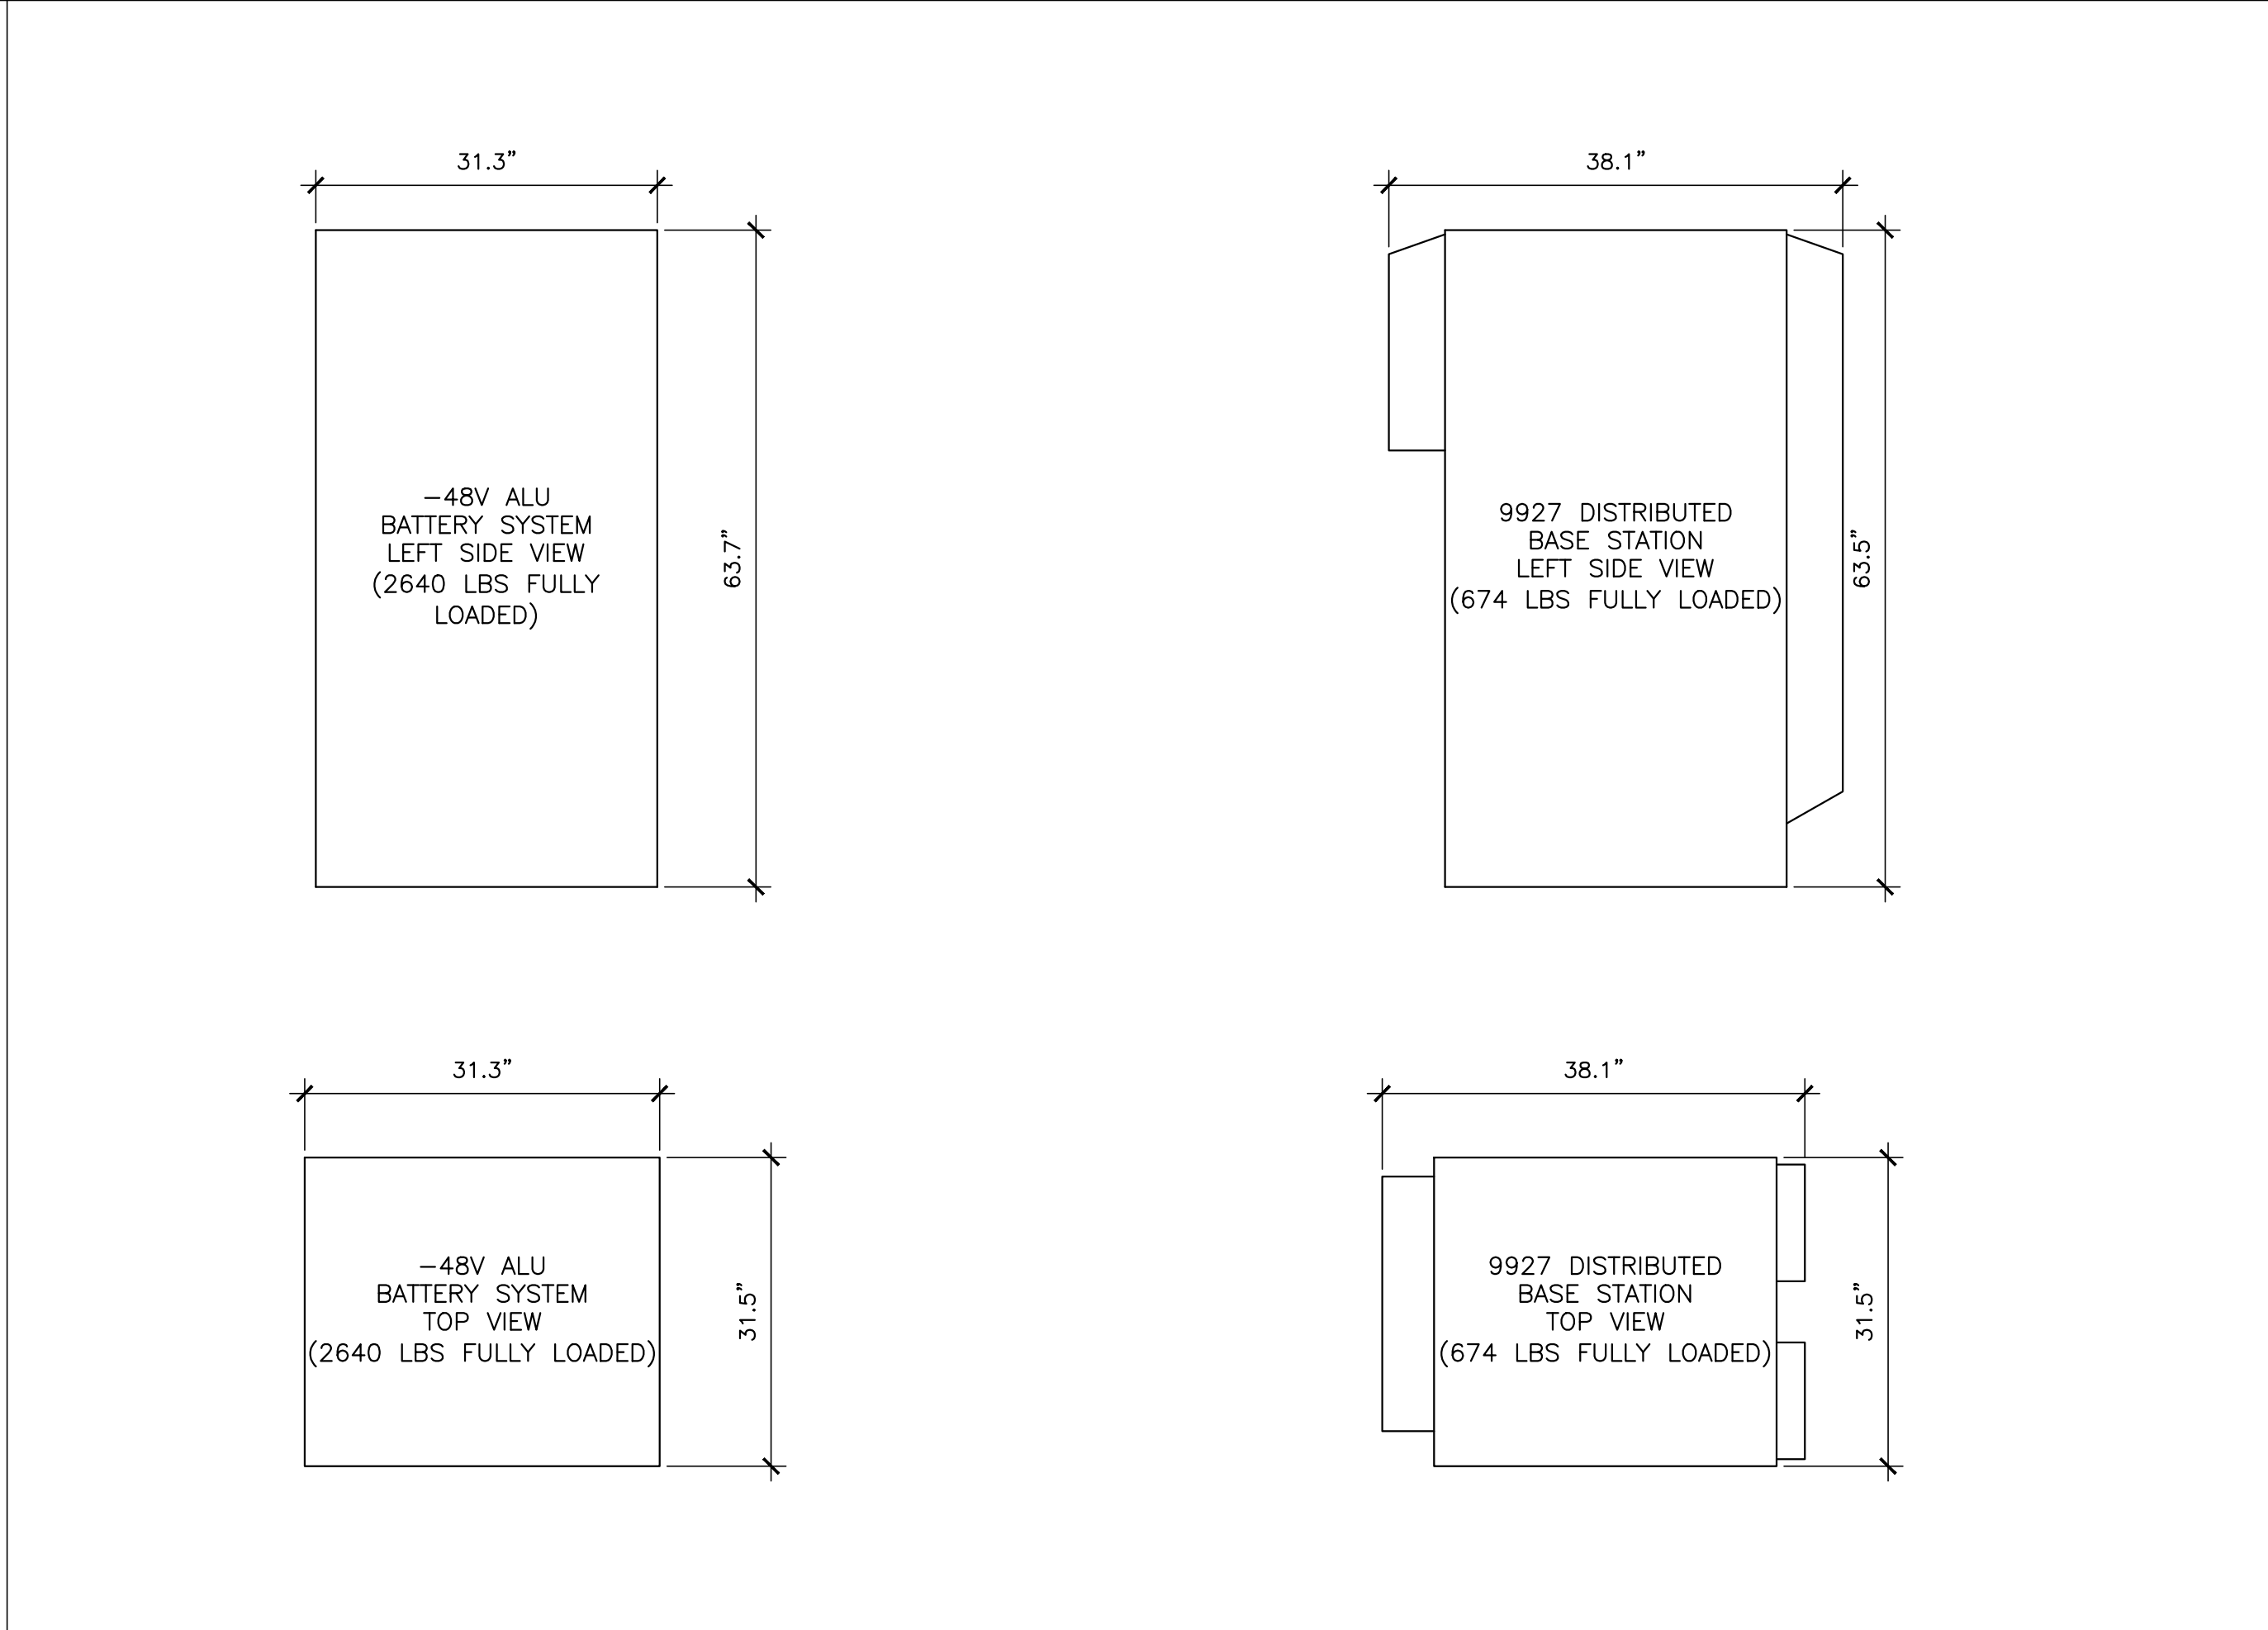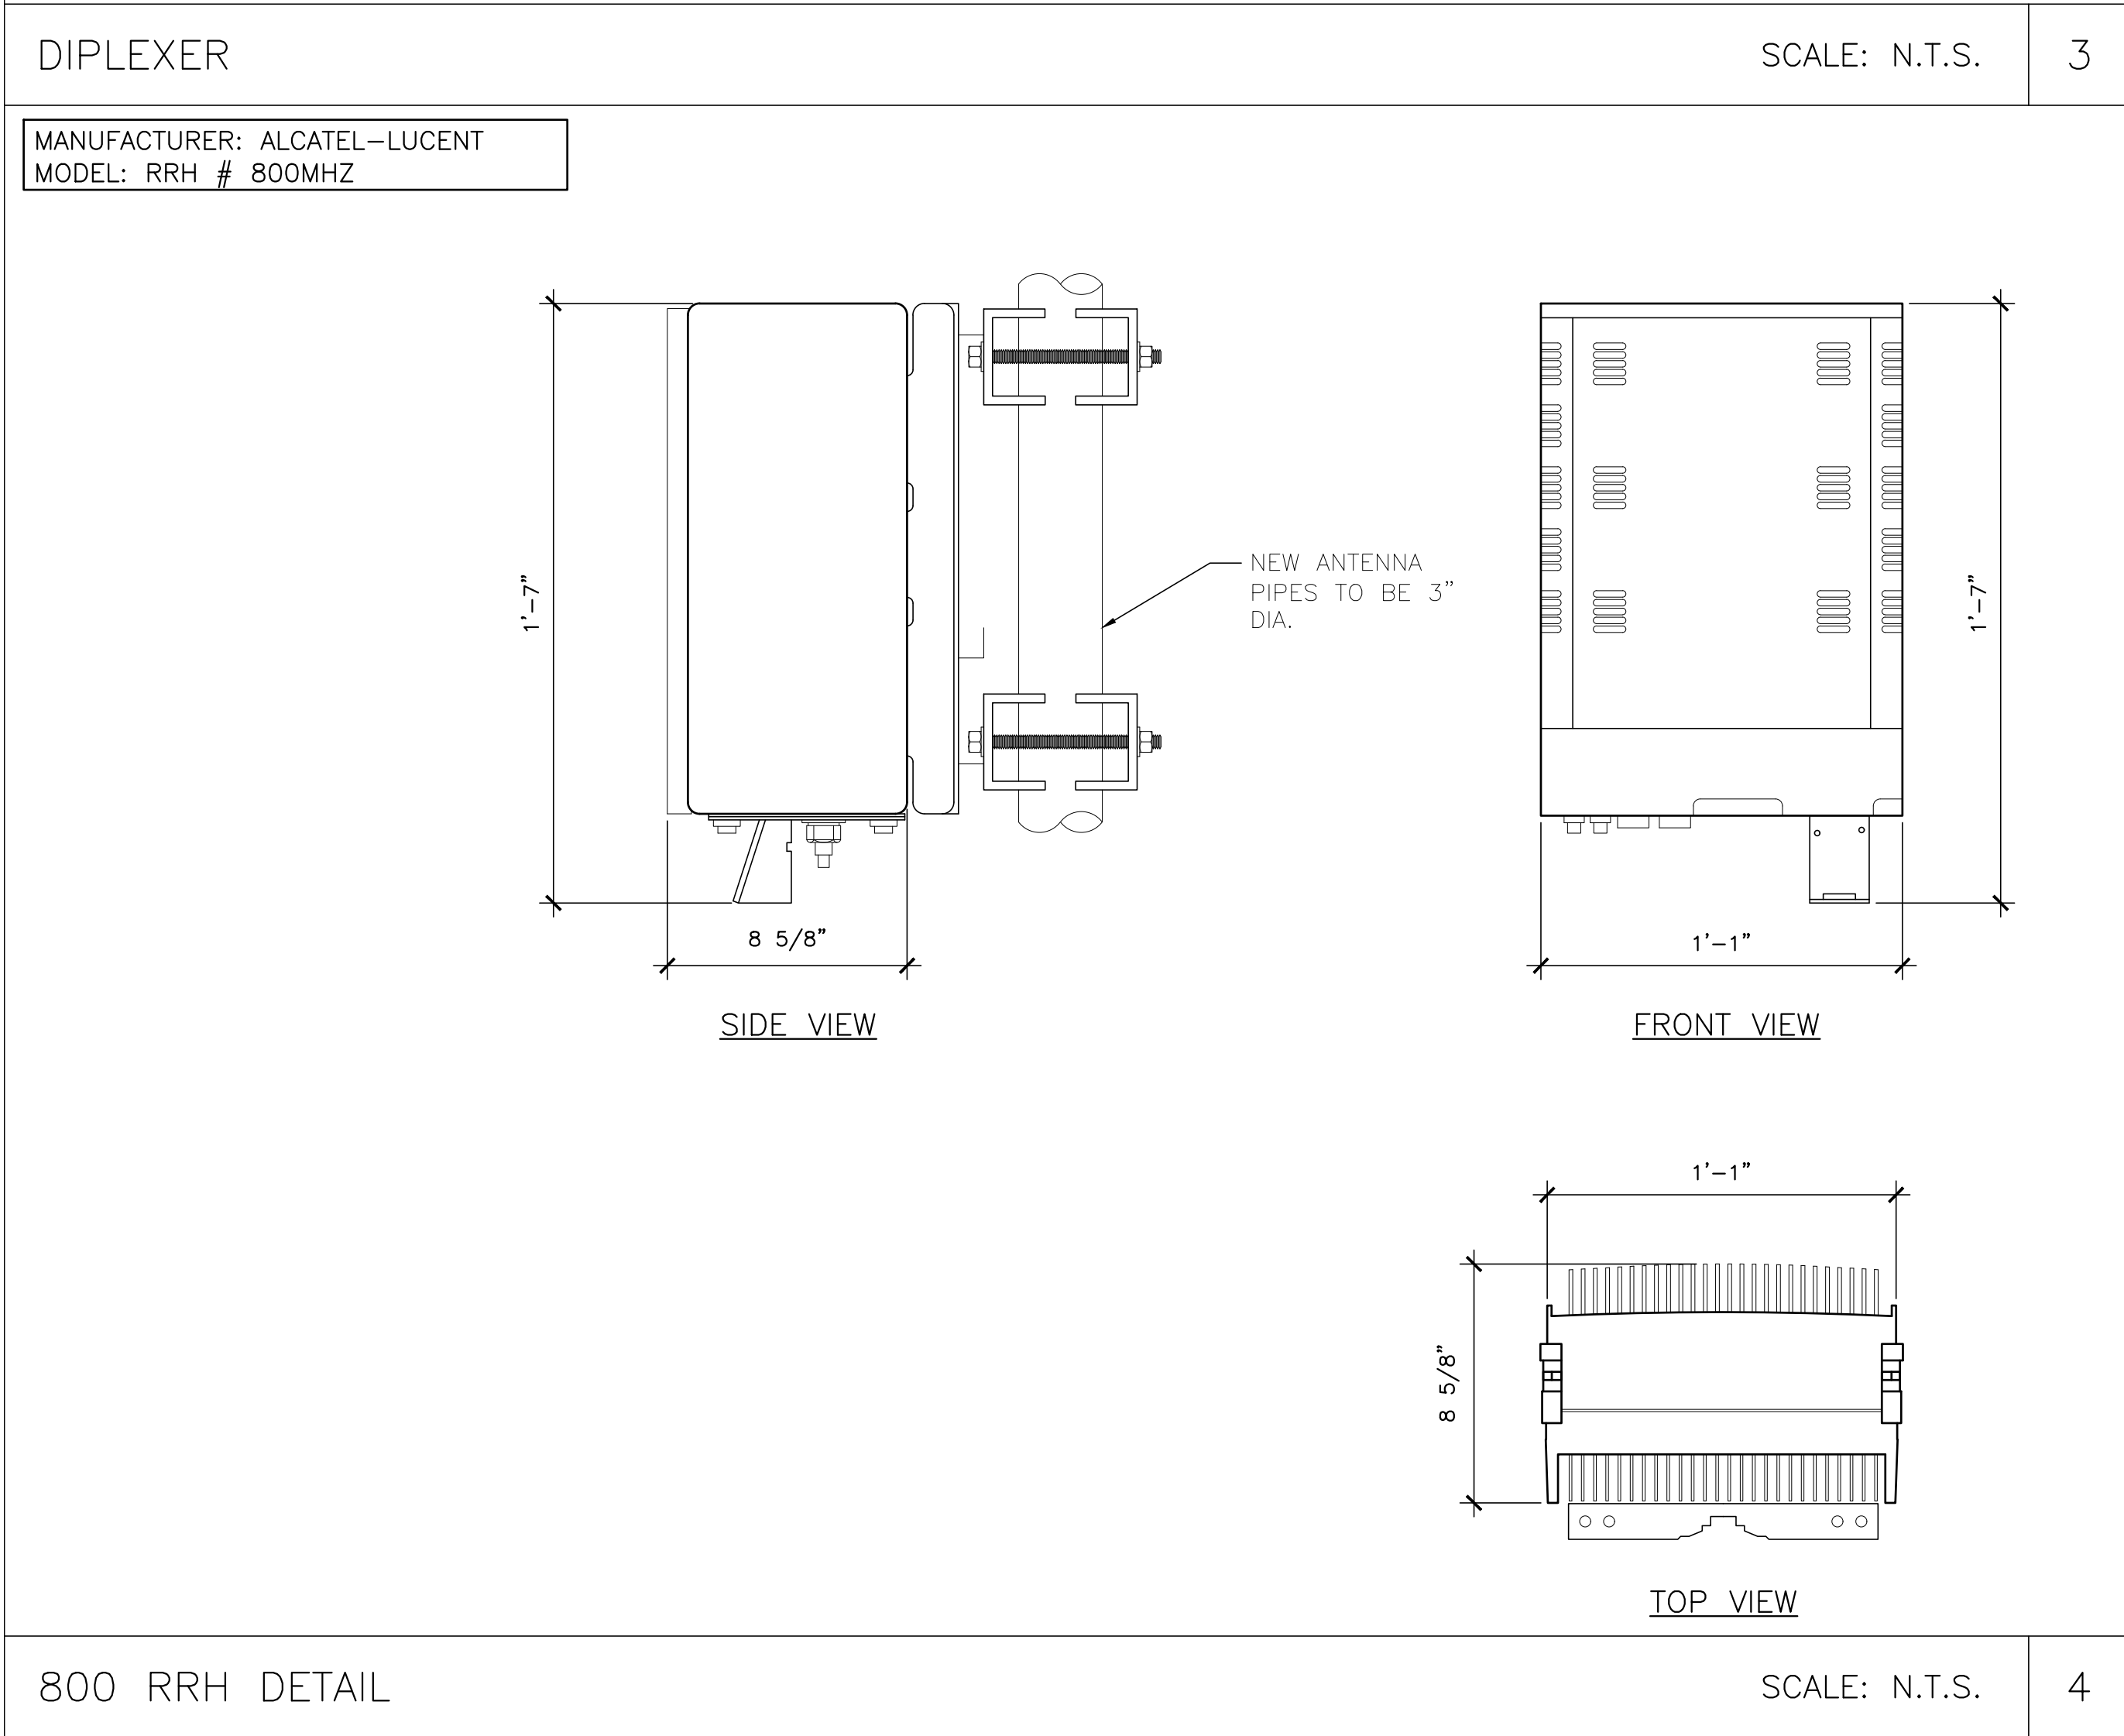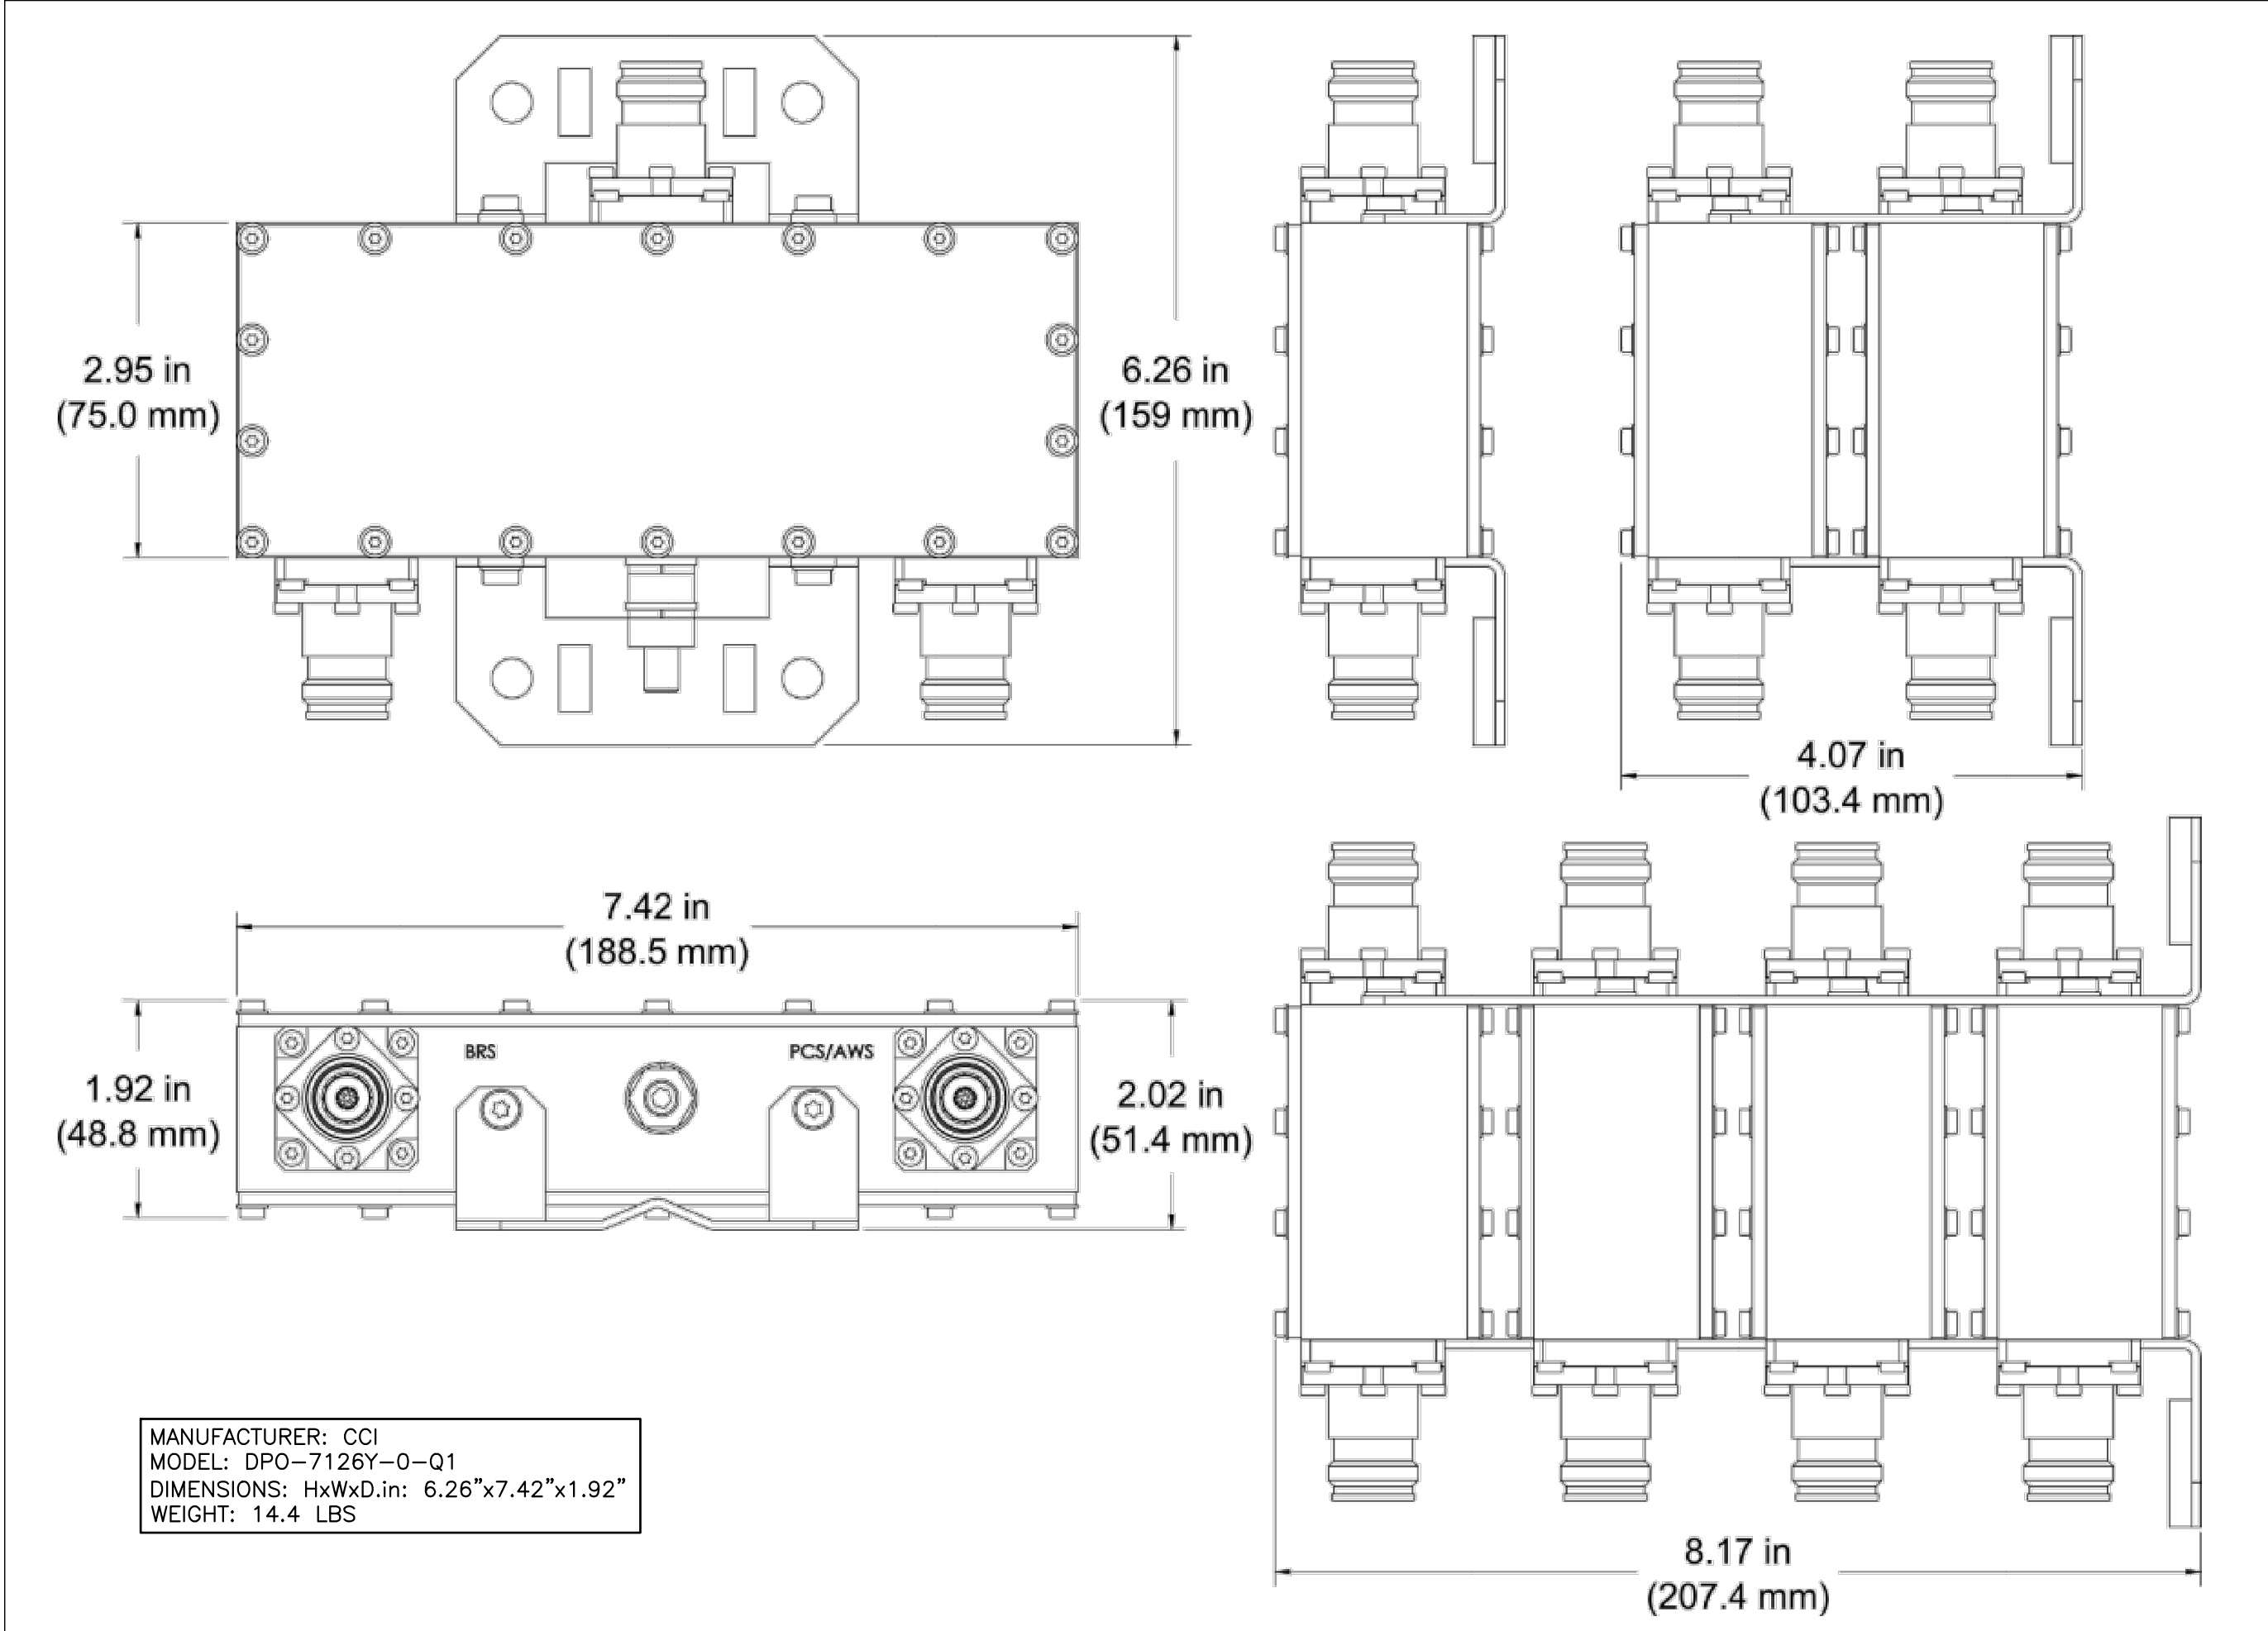

PLANS PREPARED FOR

Sprint
Together with Nextel.

CONSULTANT

COAL CREEK CONSULTING
2166 E. UNIVERSITY DR., STE 201
TEMPE, ARIZONA 85281
PHONE: (602) 429-0533 FAX: (480) 638-2852

ENGINEER OF RECORD

TERRA DYNAMIC ENGINEERING, LLC
P.O. BOX 22131, PHOENIX, AZ 85028
PHONE: (602) 482-1603
EMAIL: ROBERT@TERRADYNAMIC.US

Professional Engineer
34596
ROBERTO ORLANDO
ARIZONA 05/23/19

NO.	DATE	DESCRIPTION	BY
1	05/08/19	REVIEW	SPE
2	05/14/19	REVISION 1	SPE
3	05/21/19	REVISION 2	SPE
4	05/23/19	SUBMITTAL	SPE

PROJECT INFORMATION

JOB: 01-235-04

PH60XC104
DAYS INN
AND SUITES

7330 N. PIMA RD.
SCOTTSDALE, ARIZONA 85258

SHEET TITLE

EQUIPMENT DETAILS

SHEET NUMBER

C-6

